

COMPUTER GENERATED FORM PTO-1390 (REV 10-97)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE	ATTORNEY'S DOCKET NO. 3815-113
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED /ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371			U.S. APPLICATION NO. (if known/see 37 CFR 1.5) <b>09/762193</b>
INTERNATIONAL APPLICATION NO. PCT/JP00/03598	INTERNATIONAL FILING DATE 2 June 2000	PRIORITY DATE CLAIMED 4 June 1999	
TITLE OF INVENTION Mobile Communications Network and Data Delivery Method in Mobile Communications Network			
APPLICANT(S) FOR DO/EO/US OKAGAWA, Takatoshi; TANIMOTO, Shigeo; ISHINO, Fumiaki; OSAKO, Yoji			
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:			
<ol style="list-style-type: none"> <li><input checked="" type="checkbox"/> This is a <b>FIRST</b> submission of items concerning a filing under 35 U.S.C. 371.</li> <li><input type="checkbox"/> This is a <b>SECOND</b> or <b>SUBSEQUENT</b> submission of items concerning a filing under 35 U.S.C. 371.</li> <li><input checked="" type="checkbox"/> This is an express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).</li> <li><input type="checkbox"/> A proper Demand for International Preliminary Examination was made by the 19<sup>th</sup> month from the earliest priority date.</li> <li><input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2)) <ol style="list-style-type: none"> <li><input type="checkbox"/> is transmitted herewith (required only if not transmitted by the International Bureau).</li> <li><input checked="" type="checkbox"/> has been transmitted by the International Bureau.</li> <li><input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office.</li> </ol> </li> <li><input checked="" type="checkbox"/> A translation of the International Application into English (35 U.S.C. 371(c)(2)).</li> <li><input checked="" type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)) <ol style="list-style-type: none"> <li><input type="checkbox"/> are transmitted herewith (required only if not transmitted by the International Bureau).</li> <li><input type="checkbox"/> have been transmitted by the International Bureau.</li> <li><input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired.</li> <li><input checked="" type="checkbox"/> have not been made and will not be made.</li> </ol> </li> <li><input type="checkbox"/> A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).</li> <li><input checked="" type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).</li> <li><input type="checkbox"/> A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).</li> </ol>			
Items 11. To 16. below concern document(s) or information included:			
<ol style="list-style-type: none"> <li><input checked="" type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98.</li> <li><input checked="" type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.</li> <li><input checked="" type="checkbox"/> A <b>FIRST</b> preliminary amendment. <input type="checkbox"/> A <b>SECOND</b> or <b>SUBSEQUENT</b> preliminary amendment.</li> <li><input type="checkbox"/> A substitute specification.</li> <li><input type="checkbox"/> A change of power of attorney and/or address letter.</li> <li><input checked="" type="checkbox"/> Other items of information: <ol style="list-style-type: none"> <li>Cover page, WIPO WO 00/76247</li> <li>International Search Report, issued by JPO as Examining Authority</li> <li>Notification of Receipt of Record Copy</li> <li>Notification Concerning Submission or Transmittal of Priority Document</li> <li>Notice Informing the Applicant of the Communication of the International Application to the Designated Offices</li> </ol> </li> </ol>			
17. <input checked="" type="checkbox"/> The following fees are submitted:			

U.S. APPLICATION NO. (if known, see 37 CFR 1.5) **09/762193** INTERNATIONAL APPLICATION NO. PCT/JP00/03598 ATTORNEY'S DOCKET NO. 3815/113


BASIC NATIONAL FEE ( 37 CFR 1.492(a) (1)-(5) ):				CALCULATIONS PTO USE ONLY	
Search Report has been prepared by the EPO or JPO . . . . . \$930.00					
International preliminary examination fee paid to USPTO (37 CFR 1.482) . . . . . \$720.00					
No international preliminary examination fee paid to USPTO (37 CFR 1.482) But international search fee paid to USPTO (37 CFR 1.445(a)(2)) . . . . . \$790.00					
Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO . . . . . \$1070.00					
International preliminary examination fee paid to USPTO (37 CFR 1.482) And all claims satisfied provisions of PCT Article 33(2)-(4) . . . . . 98.00					
<b>ENTER APPROPRIATE BASIC FEE AMOUNT =</b>				\$ 930.00	
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 Months from the earliest claims priority date (37 CFR 1.492 (e))				\$	
Claims	Number Filed	Number Extra	Rate		
Total claims	36 - 20 =	16	x \$22.00	\$ 352	
Independent claims	2 - 3 =	0	x \$82.00	\$	
MULTIPLE DEPENDENT CLAIMED (if applicable)				+ \$270.00	\$ 270
<b>TOTAL OF ABOVE CACULCATIONS =</b>				\$ 1552	
Reduction of 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28)				\$	
<b>SUBTOTAL =</b>				\$ 1552	
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f))				\$	
<b>TOTAL NATIONAL FEE =</b>				\$1552	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property				\$40	
<b>TOTAL FEES ENCLOSED =</b>				\$1592	
				Amount to be Refunded	\$
				Charged	\$

- a. ☒ A check in the amount of \$ 1592.00 to cover the above fees is enclosed.
- b. ☐ Please charge my Deposit Account No. 02-4270 in the amount of \$ \_\_\_\_\_ to cover the above fees. A duplicate copy of this sheet is enclosed.
- c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 02-4270. A duplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

Brown Raysman Millstein Felder & Steiner LLP  
120 West 45<sup>th</sup> Street  
New York, New York 10036  
(212) 944-1515

  
Matthew J. Marquardt  
Registration No. 40,997

## SPECIFICATION

## TITLE OF THE INVENTION

5 MOBILE COMMUNICATIONS NETWORK AND  
DATA DELIVERY METHOD IN MOBILE COMMUNICATIONS NETWORK

## TECHNICAL FIELD

The present invention relates to a mobile  
10 communications network and a data delivery method in the  
mobile communications network.

## BACKGROUND ART

Conventionally, to deliver (transmit) data from a  
15 server, or to transfer data between mobile stations in a  
mobile communications network, so-called connection-  
oriented transfer is carried out which searches for a  
location of a mobile station from its ID, and transfers  
a call control signal between nodes of the network,  
20 followed by the data delivery.

As for a plurality of users (mobile stations)  
belonging to the same group in an area supervised by the  
same edge node (for example, base station), the location  
of each user is identified by sending the call control  
25 signal, followed by the data delivery for each user.

Furthermore, although there is a so-called  
connectionless network that sends no call control signal

at data transfer as is often seen in a normal fixed network Internet, there is no control (for example, handover control) applicable to such a case where the destination of the delivery moves incessantly.

5        Thus, the conventional data delivery method must transfer the call control signal between the nodes however small an amount of data to be delivered. As a result, it has problems of reducing node performance, requiring to develop complicated software, and increasing a system  
10 cost.

In addition, since it delivers data to user by user to deliver data to the users of the same group, it presents a problem of causing aggregation in the network, and increasing load of the data delivery server.

15

#### DISCLOSURE OF THE INVENTION

Therefore, an object of the present invention is to implement a connectionless network and connectionless transfer by assigning IP (Internet Protocol) addresses to  
20 individual nodes, location information servers, data delivery servers and mobile stations of a mobile communications network, and by carrying out data delivery using the IP addresses, thereby making it unnecessary to send the call control signal for the data delivery.

25        Another object of the present invention is to prevent aggregation of the network when delivering data to the users of the same group, thereby reducing the load of the

data delivery server.

Still another object of the present invention is to implement control such as handover in a connectionless network by using the IP addresses.

5 In order to accomplish the above mentioned objects, according to the first aspect of the present invention, a mobile communications network of the present invention comprises: one or more routing nodes for receiving data to which the IP address of a mobile station is added, and  
10 for carrying out routing of the data in accordance with routing information; and one or more edge nodes for receiving the data routed by the routing nodes, and for transmitting the data to the mobile station corresponding to the IP address of the mobile station added to the data.

15 Here, the mobile communications network may further comprise a location information server for managing information about correspondence between the IP address of the mobile station and the IP address of the edge node that supervises the area visited by the mobile station,  
20 the routing nodes may include a gate node; the gate node may retrieve, by accessing the location information server, the IP address of the edge node supervising the area visited by the mobile station corresponding to the IP address of the mobile station added to the received data, and add the  
25 IP address of the edge node to the received data; the routing information may include information about correspondence between the IP address of the edge node and

the transmission route; and the routing nodes may carry out the routing of the received data in accordance with the IP address of the edge node added to the received data and the routing information.

5        Here, when the mobile station moves from the supervisory area of an old edge node to the supervisory area of a new edge node, the moving mobile station may notify the location information server of its own IP address and the IP address of the new edge node; and the  
10       location information server may update information about correspondence between the IP address of the moving mobile station and the IP address of the edge node supervising the area visited by the moving mobile station.

         Here, when the mobile station moves from the  
15       supervisory area of an old edge node to the supervisory area of a new edge node, the moving mobile station may transmit its own IP address and the IP address of the new edge node to the old edge node; and when the old edge node thereafter receives data to which the IP address of the  
20       moving mobile station is added, the old edge node may transmit the data to the new edge node with adding the IP address of the new edge node to the data.

         Here, the routing information may include information about correspondence between the IP address of the mobile  
25       station and the transmission route, and the routing nodes may carry out the routing of the received data in accordance with the IP address of the mobile station added to the

received data and the routing information.

Here, the IP address of a group of mobile stations can be added as the IP address of the mobile station to be added to the data, and the routing nodes may have group  
5 information which is information about correspondence between the IP addresses of the mobile stations belonging to the group and the IP address of the group of the mobile stations, replicate, when the IP address of the group of the mobile stations is added to the received data, the  
10 received data by the number of the transmission routes corresponding to the IP addresses of the mobile stations corresponding to the added IP address of the group of the mobile stations in accordance with the group information and the routing information and carry out the routing of  
15 the data.

Here, the IP address of the mobile station to be added to the data can include the IP addresses of a plurality of mobile stations, the routing nodes may replicate, when the IP addresses of the plurality of the mobile stations  
20 are added to the received data, the received data by the number of the transmission routes corresponding to the IP addresses of the plurality of the mobile stations in accordance with the routing information, add to each of the data, the IP addresses of the mobile stations  
25 corresponding to each of the transmission routes, and carry out the routing of the data.

Here, the mobile station, when it moves from the

supervisory area of an old edge node to the supervisory  
area of a new edge node, may transmit its own IP address  
to the new edge node, and each node from the higher level  
routing node of the new edge node up to the junction routing  
5 node from which the transmission routes diverge to the old  
edge node and to the new edge node, may update its own  
routing information about the moving mobile station.

Here, the routing information may include information  
about correspondence between the IP address of the edge  
10 node and the transmission route, and the routing nodes may  
carry out the routing of the received data in accordance  
with the IP address of the edge node added to the received  
data and the routing information; and the mobile station  
may notify, when it moves from the supervisory area of an  
15 old edge node to the supervisory area of a new edge node,  
the old edge node of its own IP address and the IP address  
of the new edge node, and the old edge node may transmit,  
when it thereafter receives data to which the IP address  
of the moving mobile station is added, the data to the new  
20 edge node with adding the IP address of the new edge node  
to the data.

Here, the mobile communications network may further  
comprise a data delivery server for delivering data, the  
data delivery server may deliver data to the mobile station  
25 in response to a request from the mobile station.

Here, the mobile communications network may further  
comprises: a location information server for managing



information about correspondence between the IP address of the mobile station and the IP address of the edge node that supervises the area visited by the mobile station, each of the edge nodes may receive data which is transmitted  
5 by a mobile station visiting its own supervisory area and to which the IP address of the mobile station is added, retrieve by accessing the location information server the IP address of the edge node supervising the area visited by the mobile station corresponding to the IP address of  
10 the mobile station added to the received data, add the IP address of the edge node to the received data, and transmit the data to the routing node; the routing information may include information about correspondence between the IP address of the edge node and the transmission route; and  
15 the routing nodes may carry out the routing of the received data in accordance with the IP address of the edge node added to the received data and the routing information.

Here, the edge node may generate and manage information about correspondence between the IP address  
20 of the mobile station added to the received data and the IP address of the edge node supervising the area visited by the mobile station.

Here, when the mobile station moves from the supervisory area of an old edge node to the supervisory  
25 area of a new edge node during communication with another mobile station, the moving mobile station may transmit its own IP address and the IP address of the new edge node to

the edge node supervising the area visited by the party mobile station; and the edge node may update information about correspondence between the IP address of the moving mobile station and the IP address of the edge node

5 supervising the area visited by the moving mobile station.

Here, when the mobile station moves from the supervisory area of an old edge node to the supervisory area of a new edge node, the moving mobile station may transmit its own IP address and the IP address of the new edge node to the old edge node; and when the old edge node thereafter receives data to which the IP address of the moving mobile station is added, the old edge node may transmit the data to the new edge node with adding the IP address of the new edge node to the data.

15 Here, when the mobile station moves from the supervisory area of an old edge node to the supervisory area of a new edge node, the moving mobile station may notify the location information server of its own IP address and the IP address of the new edge node; and the location information server may update information about  
20 correspondence between the IP address of the moving mobile station and the IP address of the edge node supervising the area visited by the moving mobile station.

Here, each of the edge nodes may receive data which  
25 is transmitted by a mobile station visiting its own supervisory area and to which the IP address of the mobile station is added, and transmit the data to the routing node;

the routing information may include information about  
correspondence between the IP address of the mobile station  
and the transmission route; and the routing nodes may carry  
out the routing of the received data in accordance with  
5 the IP address of the mobile station added to the received  
data and the routing information.

Here, the mobile station, when it moves from the  
supervisory area of an old edge node to the supervisory  
area of a new edge node, may transmit its own IP address  
10 to the new edge node, and each node from the higher level  
routing node of the new edge node up to the junction routing  
node from which the transmission routes diverge to the old  
edge node and to the new edge node, and from the junction  
routing node to the higher routing node of the old edge  
15 node, may update its own routing information about the  
moving mobile station.

Here, the routing information may include information  
about correspondence between the IP address of the edge  
node and the transmission route, and the routing nodes may  
20 carry out the routing of the received data in accordance  
with the IP address of the edge node added to the received  
data and the routing information; and the mobile station  
may notify, when it moves from the supervisory area of an  
old edge node to the supervisory area of a new edge node,  
25 the old edge node of its own IP address and the IP address  
of the new edge node, and the old edge node may transmit,  
when it thereafter receives data to which the IP address

of the moving mobile station is added, the data to the new edge node with adding the IP address of the new edge node to the data.

According to the second aspect of the present invention, a data delivery method in a mobile communications network including one or more routing nodes and one or more edge nodes, the data delivery method of the present invention comprises the steps of: receiving, at one of the routing nodes, data to which the IP address of a mobile station is added, and carrying out routing of the data in accordance with routing information; and receiving, at one of the edge nodes, the data routed by the routing nodes, and transmitting the data to the mobile station corresponding to the IP address of the mobile station added to the data.

The foregoing configurations can implement the connectionless network and connectionless transfer with obviating the need for sending the call control signal for the data delivery in the mobile communications network.

In addition, they can prevent the network aggregation that can conventionally take place in the data delivery to users of the same group, thereby reducing the load of the data delivery server.

Furthermore, they can implement the control such as the handover in the connectionless network.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram showing a configuration of a mobile communications network of a first embodiment in accordance with the present invention;

Fig. 2 is a flowchart illustrating an example of a data delivery method in the mobile communications network of the first embodiment in accordance with the present invention;

Fig. 3 is a diagram showing an example of the format of an IP packet (data) transferred in a mobile communications network;

Fig. 4 is a block diagram illustrating an example of the first handover control in the mobile communications network of the first embodiment in accordance with the present invention;

Fig. 5 is a flowchart illustrating the example of the first handover control in the mobile communications network of the first embodiment in accordance with the present invention;

Fig. 6 is a block diagram illustrating an example of the second handover control in the mobile communications network of the first embodiment in accordance with the present invention;

Fig. 7 is a flowchart illustrating the example of the second handover control in the mobile communications network of the first embodiment in accordance with the present invention;

Fig. 8 is a block diagram showing a configuration of

a mobile communications network of a second embodiment in accordance with the present invention;

Fig. 9 is a flowchart illustrating an example of a data delivery method in the mobile communications network of the second embodiment in accordance with the present invention;

Fig. 10 is a block diagram illustrating an example of the first handover control in the mobile communications network of the second embodiment in accordance with the present invention;

Fig. 11 is a flowchart illustrating the example of the first handover control in the mobile communications network of the second embodiment in accordance with the present invention;

Fig. 12 is a block diagram illustrating an example of the second handover control in the mobile communications network of the second embodiment in accordance with the present invention;

Fig. 13 is a flowchart illustrating the example of the second handover control in the mobile communications network of the second embodiment in accordance with the present invention;

Fig. 14 is a block diagram showing a configuration of a mobile communications network of a third embodiment in accordance with the present invention;

Fig. 15 is a flowchart illustrating an example of a data transfer method between mobile stations in the mobile

communications network of the third embodiment in accordance with the present invention;

Fig. 16 is a block diagram showing tables generated and managed by edge nodes of the mobile communications network of the third embodiment in accordance with the present invention;

Fig. 17 is a block diagram illustrating an example of the first handover control in the mobile communications network of the third embodiment in accordance with the present invention;

Fig. 18 is a flowchart illustrating the example of the first handover control in the mobile communications network of the third embodiment in accordance with the present invention;

Fig. 19 is a block diagram illustrating an example of the second handover control in the mobile communications network of the third embodiment in accordance with the present invention;

Fig. 20 is a flowchart illustrating the example of the second handover control in the mobile communications network of the third embodiment in accordance with the present invention;

Fig. 21 is a block diagram showing a configuration of a mobile communications network of a fourth embodiment in accordance with the present invention;

Fig. 22 is a flowchart illustrating an example of a data transfer method between mobile stations in the mobile

communications network of the fourth embodiment in accordance with the present invention;

Fig. 23 is a block diagram illustrating an example of the first handover control in the mobile communications network of the fourth embodiment in accordance with the present invention;

Fig. 24 is a diagram showing a relationship between Fig. 24A and Fig. 24B;

Figs. 24A and 24B are a flowchart illustrating the example of the first handover control in the mobile communications network of the fourth embodiment in accordance with the present invention;

Fig. 25 is a block diagram illustrating an example of the second handover control in the mobile communications network of the fourth embodiment in accordance with the present invention; and

Fig. 26 is a flowchart illustrating the example of the second handover control in the mobile communications network of the fourth embodiment in accordance with the present invention;

#### BEST MODE FOR CARRYING OUT THE INVENTION

The best mode for carrying out the invention will now be described in detail.

#### FIRST EMBODIMENT

Fig. 1 is a block diagram showing a configuration of a mobile communications network of the first embodiment



in accordance with the present invention.

The mobile communications network of the present embodiment comprises a data delivery server 101, gate node 102, repeater nodes 103 and 104, edge nodes 105-108, and  
5 a location information server 100.

The data delivery server 101, gate node 102, repeater nodes 103 and 104, and edge nodes 105-108 have IP addresses (#1, #2, #3, #4, and #5-#8, respectively, in the present embodiment), and a mobile station 109 also has an IP address  
10 (#9 in the present embodiment).

The gate node 102 and the repeater nodes 103 and 104 are routing nodes for carrying out data routing in accordance with routing information.

Fig. 2 is a flowchart illustrating an example of a  
15 data delivery method of the mobile communications network of the first embodiment in accordance with the present invention.

The data delivery server 101 manages the IP address of a mobile station to which data (IP packet) is to be  
20 delivered, and transmits the data along with the IP address of the mobile station to the gate node 102 (step S101).

The gate node 102 accesses the location information server 100 to capture the IP address of the edge node supervising the area visited by the mobile station  
25 corresponding to the IP address of the mobile station added to the received data (step S102).

The location information server 100 manages the IP

address of the edge node supervising the area visited by the mobile station corresponding to the IP address. As an example of the location information server 100, there is a home location register (HLR) or a visiting location register (VLR).

After capturing the IP address of the edge node by accessing the location information server 100, the gate node 102 adds the IP address of the edge node to the received data (step S103), that is, encapsulates the received IP packet for the mobile station into the IP packet for the edge node, and transmits it to the repeater node (step S104).

Incidentally, apart from the example of Fig. 1, it is also possible to configure the network in such a manner that the gate node is directly connected to the edge nodes without the repeater nodes. In this case, the gate node transmits the data directly to the edge nodes.

Fig. 3 is a diagram showing an example of a format of the IP packet (data) to be transferred in the mobile communications network. The IP packet shown in Fig. 3 is an IP packet associated with user information that includes the IP address of the edge node added thereto. In the format as shown Fig. 3, the reference symbol UD (User Data) designates data to be delivered, UIP (User IP) designates the IP address of the mobile station, and DGA (Destination Gatewaynode Address) designates the IP address of the edge node. The reference symbol UI (User Information) is an

identifier indicating that the IP packet is the user information, which is added to distinguish it from an IP packet associated with control information. As for the IP packet associated with the control information, it  
5 includes an identifier indicating that the IP packet carries the control information. The UIP is added by the data delivery server 101, and the DGA is added by the gate node 102.

In the present embodiment, the gate node 102 records  
10 the correspondence between the IP address of the mobile station it captures by accessing the location information server and the IP address of the edge node so that the gate node utilizes the correspondence in the subsequent processing without accessing the location information  
15 server 100. However, it is also possible for the gate node 102 to access the location information server 100 every time it receives the data to capture the correspondence without recording the correspondence.

The gate node 102 has routing information (routing  
20 table) that includes transmission route information about the IP address of the edge node. In the example as shown in Fig. 1, the gate node 102 has the routing information that the route for the edge node 105 with the IP address #5 is the repeater node 103 with the IP address #3.  
25 Accordingly, the gate node 102 that receives the data with the IP address of the edge node #5 transmits the data to the repeater node 103.

In accordance with the IP address of the edge node added to the received data, the repeater node 103 or 104 transmits the data to another repeater node or the edge node (edge node in the network configuration as shown in Fig. 1) (step S104). The repeater nodes 103 and 104 also have routing information that includes the transmission route information about the IP address of the edge node. In the example as shown in Fig. 1, the repeater node 103 has the routing information that the route for the edge node 105 with the IP address #5 is the edge node 105 itself with the IP address #5 (in this case, the next transmission destination is the destination node itself).

Receiving the data (step S105), one of the edge nodes 105-108 transmits the data to the mobile station with the IP address added to the received data. Specifically, it extracts the encapsulated IP packet for the mobile station, and transmits it to the mobile station (step S106). In the example as shown in Fig. 1, the edge node 105, receiving the data with the IP address #9 of the mobile station 109, transmits the data to the mobile station 109.

Thus, the mobile station 109 receives the data addressed to itself from the edge node (step S107).

The foregoing configuration and procedure can implement a connectionless network and connectionless transfer that obviate the need for sending the data call control signal for the delivery.

It is also possible to add the IP address of a group

of mobile stations as the IP address of the mobile station to be added to the data (the IP address of the mobile station to receive the data delivery). In this case, the location information server 100, for example, manages the

5 information (group information) of the IP address of the edge node supervising the area visited by the mobile stations which belong to the group corresponding to the IP address of the group of the mobile stations.

When the IP address of the group of the mobile stations

10 is added to the received data, the gate node 102 accesses the location information server 100 to capture the IP addresses of the edge nodes supervising the areas visited by the mobile stations corresponding to the IP address, that is, the mobile stations which belong to the group.

15 When the mobile stations belonging to the group are spread over supervisory areas of a plurality of edge nodes, the gate node 102 captures a plurality of the IP addresses of the edge nodes. The gate node 102 replicates the received data by the number of (the IP addresses of) the edge nodes

20 captured. It adds to each data the IP address of the edge node, and the IP addresses of the mobile station visiting the supervisory area of the edge node.

The edge node replicates the data by the number of the mobile stations and transmits them to the respective

25 mobile stations. Alternatively, a particular group ID can be assigned to all the mobile stations belonging to the same group so that the edge node can broadcast the data

with adding the group ID. Thus, only the mobile stations with the group ID (belonging to the group) can capture the data.

As for the participation of the mobile stations in the group, it can be either fixed or temporary.

Alternatively, the location information server 100 can have its own IP address so that the users of the mobile stations can access the location information server 100 using the IP address to conduct group registration.

Thus, enabling addition of the IP address of the group of the mobile stations can obviate the need for delivering data to each mobile station, reducing the load of the data delivery server. Furthermore, transmitting the data on the edge node by edge node basis can prevent the network aggregation.

The data delivery server 101 can be designed such that it can deliver data to the mobile station 109 in response to its request. For example, the mobile station 109 transmits data to the data delivery server 101 with adding the IP address of the data delivery server 101 to the data including information about the data to be delivered and the IP address of the mobile station 109. Receiving the data, the data delivery server 101 transmits the requested data to the mobile station 109 with adding the IP address of the mobile station 109.

Fig. 4 is a block diagram illustrating an example of the first handover control in the mobile communications

network of the first embodiment in accordance with the present invention, and Fig. 5 is a flowchart illustrating the example of the first handover control in the mobile communications network of the first embodiment in

5 accordance with the present invention. The handover control will be described by means of an example in which the mobile station 109 moves from the supervisory area of the edge node 105 to that of the edge node 106.

The edge nodes 105-108 each broadcast their own IP  
10 addresses to their supervisory areas. The mobile station 109 receives one of the IP addresses the edge nodes broadcast, and stores it.

When the broadcast IP address differs from the currently stored IP address, the mobile station 109 decides  
15 that its visiting area changes, and notifies the location information server 100 of its own IP address and the IP address of the new edge node via the gate node 102 (step S201). In the example of Fig. 4, the mobile station 109 notifies the location information server 100 of its own  
20 IP address and the IP address of the edge node 106 via the edge node 106, repeater node 103 and gate node 102, for example.

If the gate node 102 has already established, in the form of table, for example, the relationship between the  
25 received IP address of the mobile station and the IP address of the edge node visited by the mobile station by having accessed the location information server 100, it updates

the table to bring the IP address of the mobile station into correspondence with the received IP address of the new edge node (step S202). The location information server 100 also updates its information to bring the two  
5 IP addresses into correspondence (the update is carried out regardless of whether the gate node 102 has the table or not) (step S203).

In the example of Fig. 4, the IP address of the edge node the mobile station 109 visits is changed from #5 to  
10 #6. When the gate node 102 holds the relationship between the IP address of the mobile station and that of the edge node, it updates the relationship. After the update, the gate node 102 transmits the data to which the IP address #9 of the mobile station 109 is added after adding the IP  
15 address of the edge node #6 to the data.

In this way, the handover control is implemented in the connectionless network.

Fig. 6 is a block diagram illustrating an example of the second handover control in the mobile communications  
20 network of the first embodiment in accordance with the present invention, and Fig. 7 is a flowchart illustrating the example of the second handover control in the mobile communications network of the first embodiment in accordance with the present invention. The handover  
25 control will be described by means of an example in which the mobile station 109 moves from the supervisory area of the edge node 105 to that of the edge node 106.



The edge nodes 105-108 each broadcast their own IP addresses to their supervisory areas. The mobile station 109 receives one of the IP addresses the edge nodes broadcast, and stores it.

5        Detecting that the broadcast IP address differs from the currently stored IP address, the mobile station 109 decides that its visiting area changes, and transmits its own IP address and the IP address of the new edge node to the old edge node (step S301). In the example of Fig. 6,  
10    the mobile station 109 transmits its own IP address #9 and the IP address #6 of the new edge node 106 to the edge node 105. The transmission to the edge node 105 is carried out via the edge node 106 and repeater node 103, for example.

      The old edge node creates a transfer table  
15    establishing the relationship between the IP address of the mobile station and the IP address of the new edge node (redirection edge node) (S302) so that when the old edge thereafter receives data to which the IP address of the mobile station is added, it transmits (transfers) the data  
20    to the new edge node with adding the IP address of the new edge node to the data. In the example of Fig. 6, when receiving the data to which the IP address #9 of the mobile station 109 is added, the edge node 105 transmits the data to the edge node 106 with adding the IP address #6 of the  
25    edge node 106 to the data.

In this way, the handover control can be implemented in the connectionless network. Using the second handover

control can reduce the data (packet) loss as compared with using the first handover control.

In the second handover control, however, there is a possibility of transmission delay or aggregation

5 (aggregation between the edge node 105 and repeater node 103 of Fig. 6, for example) because the data is transferred from the first visiting edge node of the mobile station. Therefore, it is possible to update the location information server 100 as in the first handover control  
10 at some opportunity.

As the opportunity for the update, it will be possible to utilize the end of the current communication, the elapse of a predetermined time period after the exhaustion of the data, and the like. It will also be possible to update  
15 after a predetermined time period has elapsed from the start of the transfer to the new edge node by the old edge node. Alternatively, if the traffic of some edge node exceeds a threshold value, that edge node carries out the update associated with the IP address of the mobile station  
20 to which the edge node transfers.

The update of the location information server 100 is implemented when the old edge node transfers the IP address of the mobile station and that of the new edge node to the gate node 102. After transferring the IP addresses, the  
25 old edge node releases its own transfer table, which is preferably carried out after it receives the notification from the gate node 102 that the update of the location

information server 100 is completed, to prevent data (packet) loss.

## SECOND EMBODIMENT

5       The second embodiment in accordance with the present invention carries out routing by the IP address of the mobile station.

10       Fig. 8 is a block diagram showing a configuration of a mobile communications network of the second embodiment in accordance with the present invention. It will now be described with placing emphasis on the difference from the mobile communications network of the first embodiment in accordance with the present invention.

15       The mobile communications network of the present embodiment comprises a data delivery server 201, a gate node 202, repeater nodes 203 and 204, and edge nodes 205-208, but not a location information server.

20       The data delivery server 201, gate node 202, repeater nodes 203 and 204 and edge nodes 205-208 have IP addresses (#1, #2, #3, #4 and #5-#8 in the present embodiment), and a mobile station 209 has an IP address (#9 in the present embodiment).

25       The gate node 202 and repeater nodes 203 and 204 are a routing node that carries out data routing in accordance with the routing information.

      Fig. 9 is a flowchart illustrating an example of a data delivery method of the mobile communications network

of the second embodiment in accordance with the present invention.

The data delivery server 201 manages the IP address of a target mobile station of the data (IP packet) delivery,  
5 and transmits the data to the gate node 202 with adding the IP address of the mobile station to the data (step S401) as in the first embodiment in accordance with the present invention.

The gate node 202 carries out the routing of the data  
10 in accordance with the IP address of the mobile station added to the received data (step S402). The gate node 202 possesses the routing information including transmission route information about the IP address of the mobile station. The gate node 202 has the transmission route  
15 information on all (IP addresses of) the mobile stations.

In the example of Fig. 8, the gate node 202 has routing information that a route for the edge node supervising the visiting area of the mobile station 209 with the IP address #9 is the repeater node 203 with the IP address #3.  
20 Therefore, when receiving data to which the IP address of the mobile station #9 is added, the gate node 202 transmits the data to the repeater node 203.

The present embodiment which carries out the routing according to the IP address of the mobile station differs  
25 from the first embodiment that carries out the routing according to the IP address of the edge node. Thus, the location information server is not needed.

The repeater node 203 or 204 also transmits the received data to another repeater node or edge node in accordance with the IP address of the mobile station added to the data (step S402). Both the repeater nodes 203 and 204 have the routing information that includes transmission route information about the IP address of the mobile station. The repeater nodes 203 and 204 have the transmission route information about the (IP addresses of the) mobile stations visiting the supervisory areas of the edge nodes under their control.

In the example of Fig. 8, the repeater node 203 has the routing information that the route for the edge node supervising the visiting area of the mobile station 209 with the IP address #9 is the edge node 205 with the IP address #5.

Receiving the data (step S403), one of the edge nodes 205-208 transmits the data to the mobile station with the IP address added to the received data (step S404), so that the mobile station 209 receives the data addressed and transmitted thereto from the edge node (step S405), as in the first embodiment in accordance with the present invention.

The foregoing configuration and procedure can implement the connectionless network and connectionless transfer that can obviate the need for sending the call control signal in the data delivery.

In the present embodiment, although the total amount

of the routing information of the network increases as compared with that of the first embodiment in accordance with the present invention, it can eliminate the central management (location information server).

5       The IP address of a group of mobile stations can be added as the IP address of the mobile station to be added to the data.

10       In this case, the gate node 202 and the repeater nodes 203 and 204, for example, have information (group information) about the IP addresses of the edge nodes supervising the areas visited by the mobile stations which belong to the group with the IP address of the group.

15       When the IP address of the group of the mobile stations is added to the received data, the gate node 202 and repeater nodes 203 and 204 capture the IP addresses of the mobile stations corresponding to the IP address of the group in accordance with the group information, first. Subsequently, they capture transmission routes corresponding to the IP addresses of the mobile stations in accordance with the routing information. The gate node 202 and repeater nodes 203 and 204 replicate the received data by the number of the captured transmission routes, and transmit the data to the mobile stations. Since the IP address of the group of the mobile stations is added to the data, a similar processing is carried out at the next repeater node. The data is replicated by the number of the mobile stations by the edge nodes, and transmitted

to the mobile stations.

As for the group information, the gate node 202 can transmit it along with the data, or can possess it in advance and notify the repeater nodes 203 and 204 of it by broadcasting. It is enough for the gate node 202 and repeater nodes 203 and 204 to have the group information at the time when carrying out the routing of the data to which the IP address of the group is added. Accordingly, it is possible to design such that the gate node 202 broadcasts the group information to the repeater nodes 203 and 204 every time it carries out the routing of the data to which the IP address of the group is added, and deletes the group information after the repeater nodes 203 and 204 each carry out the routing of the data.

Thus enabling the IP address of the group of the mobile stations to be added can obviate the need for delivering the data to each of the mobile stations, thereby reducing the load of the data delivery server. In addition, since the data is replicated and transmitted only when necessary, the network aggregation can be prevented.

Furthermore, the IP addresses of a plurality of mobile stations can be added as the IP address of the mobile station to be added to the data.

When the IP addresses of a plurality of mobile stations are added to the received data, the gate node 202 and repeater nodes 203 and 204 capture transmission routes corresponding to the IP addresses of the mobile stations

in accordance with the routing information. The gate node 202 and repeater nodes 203 and 204 replicate the received data by the number of the captured transmission routes, and add to each of the data the IP addresses of the mobile stations corresponding to each of the transmission routes. Then, they transmit the data to the mobile stations. The edge nodes replicate the data by the number of the mobile stations, and transmit them to the mobile stations.

Assume that the example of Fig. 8 has three mobile stations each of which visiting one of the supervisory areas of the edge nodes 205-207. Receiving the data to which the IP addresses of the three mobile stations are added, the gate node 202 generates two replicas of the data, and sends them to the repeater nodes 203 and 204. The repeater node 203 generates two replicas of the data, and transmits them to the edge nodes 205 and 206. On the other hand, the repeater node 204 transmits the data (without replicating the data) to the edge node 207.

In this way, enabling the plurality of the IP addresses of the mobile stations to be added can obviate the need for delivering the data to each of the mobile stations, thereby reducing the load of the data delivery server. In addition, since the data is replicated and transmitted only when necessary, the network aggregation can be prevented.

A configuration is also possible which enables the data delivery server 201 to deliver data to the mobile station 209 in response to a request from the mobile station



209 as in the first embodiment in accordance with the present invention.

Fig. 10 is a block diagram illustrating an example of the first handover control in the mobile communications network of the second embodiment in accordance with the present invention, and Fig. 11 is a flowchart illustrating the example of the first handover control in the mobile communications network of the second embodiment in accordance with the present invention. The handover control will be described by means of an example in which the mobile station 209 moves from the supervisory area of the edge node 205 to that of the edge node 206.

The edge nodes 205-208 each broadcast their own IP addresses to their supervisory areas. The mobile station 209 receives one of the IP addresses the edge nodes broadcast, and stores it.

Detecting that the broadcast IP address is different from the currently stored IP address, the mobile station 209 decides that its visiting area changes, and transmits its own IP address to the new edge node (step S501). In the example of Fig. 10, the mobile station 209 transmits its own IP address to the edge node 206.

The new edge node transmits the IP address of the moving mobile station to the higher level routing node (repeater node or gate node) (step S502). The routing node that receives the IP address of the mobile station updates its own routing information about the (IP address of the)

mobile station (or creates new information when there is no information about the mobile station) (step S503). Subsequently, it transmits the IP address of the mobile station to a still higher level routing node. Such a  
5 processing is repeated up to the routing node from which two transmission routes diverge to the old edge node and to the new edge node (steps S504 and S505).

In the example of Fig. 10, the higher level routing node of the new edge node is the repeater node 203, and  
10 the routing node from which the transmission routes diverge into the old edge node (edge node 205) and the new edge node (edge node 206) is also the repeater node 203. Accordingly, the repeater node 203 updates the routing information about the (IP address of the) mobile station  
15 209, and changes the route from the edge node 205 (IP address #5) to the edge node 206 (IP address #6).

Here, consider an example in which the mobile station 209 moves from the supervisory area of the edge node 206 to that of the edge node 207. In this case, the higher  
20 level routing node of the new edge node is the repeater node 204, and the routing node from which the transmission routes diverge into the old edge node (edge node 206) and the new edge node (edge node 207) is the gate node 202. Accordingly, the repeater node 204 and the gate node 202  
25 update the routing information about the (IP address of the) mobile station 209.

To distinguish the junction routing node from which

the transmission routes diverge into the old edge node and the new edge node, a method can be conceived in which routing is always carried out to the higher level routing node at the routing nodes other than the routing nodes on the transmission route from the highest level node (the gate node 202 in the example of Fig. 10) to the edge node supervising the area visited by the mobile station.

Checking the routing information successively in ascending order from the higher level routing node of the new edge node, if the routing node has the routing information indicating a route to a lower level routing node, that routing node is identified as the junction node.

Likewise, a method can be conceived in which no routing information about the mobile station is provided to the routing nodes other than the routing nodes on the transmission route from the highest level node (the gate node 202 in the example of Fig. 10) to the edge node supervising the area visited by the mobile station. Checking the routing information in ascending order from the new edge node to the higher level routing node successively, if the routing node has the routing information about the moving mobile station, that routing node is identified as the junction node.

To apply the foregoing methods, after updating the routing information from the higher level routing node of the new edge node up to the junction routing node, the routing information about the moving mobile station is

updated from the lower level routing node of the junction routing node down to the higher level routing node of the old edge node (updates the routing information such that data is transmitted to the higher level node, or eliminates the routing information). The signal for updating the routing information can be made and notified either by the junction routing node or by the new edge node.

Besides the foregoing methods, a method is possible in which tracing a route from the new edge node up to the highest level node, the routing nodes update the routing information about the moving mobile station so that the data addressed to the mobile station is transmitted from the highest level node to the new edge node.

The foregoing update methods of the routing information are applicable to the power up of the mobile station.

In this way, the handover control can be implemented in the connectionless network.

Fig. 12 is a block diagram illustrating an example of the second handover control in the mobile communications network of the second embodiment in accordance with the present invention, and Fig. 13 is a flowchart illustrating the example of the second handover control in the mobile communications network of the second embodiment in accordance with the present invention. The handover control will be described by means of an example in which the mobile station 209 moves from the supervisory area of

the edge node 205 to that of the edge node 206.

The edge nodes 205-208 each broadcast their own IP addresses to their supervisory areas. The mobile station 209 receives one of the IP addresses the edge nodes  
5 broadcast, and stores it.

Detecting that the broadcast IP address is different from the currently stored IP address, the mobile station 209 decides that its visiting area changes, and transmits its own IP address and the IP address of the new edge node  
10 to the old edge node (step S601). In the example of Fig. 12, the mobile station 209 transmits its own IP address #9 and the IP address #6 of the edge node 206 to the edge node 205. The transmission to the edge node 205 is carried out by placing information about correspondence between  
15 the IP address of the edge node and the transmission route into the routing information of each routing node as illustrated in Fig. 12, for example.

The old edge node creates a transfer table establishing the relationship between the IP address of  
20 the mobile station and the IP address of the new edge node (redirection edge node) (S602) so that when the old edge node thereafter receives data to which the IP address of the mobile station is added, it transmits (transfers) the data to the new edge node with adding the IP address of  
25 the new edge node to the data. In the example of Fig. 12, when receiving the data to which the IP address #9 of the mobile station 209 is added, the edge node 205 transmits

the data to the edge node 206 with adding the IP address #6 of the edge node 206 to the data. Thus, the transmission to the new edge node 206 is carried out by placing the transmission route information about the IP address of the edge node into the routing information of the routing nodes  
5 as described above.

In this way, the handover control can be implemented in the connectionless network. Using the second handover control can reduce the data (packet) loss as compared with  
10 using the first handover control.

In the second handover control, however, there is a possibility of transmission delay or aggregation (aggregation between the edge node 205 and repeater node 203 of Fig. 12, for example) because the data is transferred  
15 from the first visiting edge node of the mobile station. Therefore, it is possible to update the routing information of the repeater node as in the first handover control at some opportunity.

As for the opportunity for the update, it is analogous  
20 to that of the first embodiment in accordance with the present invention.

The update of the routing information is implemented from the higher level routing node of the new edge node to the junction node as in the first handover control, for  
25 example. The release of the transfer table of the old edge node is preferably carried out after the update of the routing information of the junction node to prevent the

data (packet) loss.

As described above, the second embodiment in accordance with the present invention can obviate the need for the location information server. In other words, it is possible for the network to carry out the data delivery, handover control and the like in the mobile communications without installing the location information server such as HLV and VLR for registering locations of users.

### 10 EMBODIMENT 3

The third embodiment in accordance with the present invention implements data transfer between mobile stations. The routing is carried out using the IP addresses of the edge nodes as in the first embodiment.

15 Fig. 14 is a block diagram showing a configuration of a mobile communications network of the third embodiment in accordance with the present invention.

The mobile communications network of the present embodiment comprises a gate node 302, repeater nodes 303 and 304, edge nodes 305-308, and a location information server 300. The functions of the nodes and the server are the same as those of their counterparts in the first embodiment.

The gate node 302, repeater nodes 303 and 304, and edge nodes 305-308 have their own IP addresses (#2, #3, #4, and #5-#8, respectively, in the present embodiment), and mobile stations 309 and 310 also have their own IP

addresses (#9 and #10 in the present embodiment).

The gate node 302 and the repeater nodes 303 and 304 are a routing node for carrying out routing of the data in accordance with routing information.

5        Fig. 15 is a flowchart illustrating part of a data transfer method between mobile stations in the mobile communications network of the third embodiment in accordance with the present invention.

Assume that a mobile station (309, for example)  
10        transmits data (IP packet) with adding the IP address (#10) of a party mobile station (310, for example) to the edge node (305, in this case) (step S701).

The edge node accesses the location information server 300 to retrieve the IP address of the edge node  
15        supervising the area visited by the mobile station corresponding to the IP address of the mobile station added to the received data (S702). In the present embodiment, the edge node generates information (table) about the retrieved relationship and manages it. After that, there  
20        is no need to access the location information server 300, though it is also possible to design to access the location information server 300 every time the packet is received (in which case, the table is not needed). Alternatively, it is also possible to design to access the location  
25        information server 300 periodically to update the table (in which case, the load of the location information server 300 is reduced as compared with the case that accesses it



for each packet).

After retrieving the IP address of the edge node by accessing the location information server 300, the edge node adds the IP address of the edge node to the received data (S703), that is, encapsulates the received IP packet for the mobile station into the IP packet for the edge node, and transmits it to the routing node (S704).

In the example of Fig. 14, since each edge node is connected with only one repeater node, the data is transmitted to the corresponding one of the repeater nodes. The edge node, however, can be connected to a plurality of repeater nodes, in which case, the edge node carries out routing in accordance with the IP address of the destination edge node of the data.

The subsequent routing of the data is analogous to that of the first embodiment. For example, the data transmitted from the mobile station 309 to the mobile station 310 is transmitted through the edge node 305, repeater node 303 and edge node 306, and arrives at the mobile station 310. The data transmission from the mobile station 310 to the mobile station 309 is carried out in a similar manner.

Fig. 16 is a block diagram showing an example of the table the edge node generates and manages in the mobile communications network of the third embodiment in accordance with the present invention. The edge node 305, receiving the data for the mobile station 310 from the

mobile station 309, identifies that the edge node of the mobile station 310 is the edge node 306, and generates and manages the table as shown in Fig. 16. Likewise, the edge node 306, receiving the data for the mobile station 309 from the mobile station 310, identifies that the edge node of the mobile station 309 is the edge node 305, and generates and manages the table as shown in Fig. 16.

Fig. 17 is a block diagram illustrating an example of the first handover control in the mobile communications network of the third embodiment in accordance with the present invention, and Fig. 18 is a flowchart illustrating the example of the first handover control in the mobile communications network of the third embodiment in accordance with the present invention. The handover control will be described by means of an example in which the mobile station 310 moves from the supervisory area of the edge node 306 to that of the edge node 307.

Detecting that the broadcast IP address is different from the currently stored IP address, the mobile station 310 decides that its visiting area changes, and transmits its own IP address and the IP address of the new edge node to the edge node (party edge node, in this case the edge node 305) supervising the visiting area of the party mobile station (mobile station 309) (S801).

A few methods are conceivable of transmitting the newly corresponding two IP addresses (the IP address of the mobile station 310 and the IP address of the edge node

307) to the party edge node. For example, there is a method in which the moving mobile station 310 notifies the new edge node 307 of the IP address of the party mobile station 309, so that the edge node 307 accesses the location information server 300 to retrieve the edge node (edge node 5 305) of the mobile station 309, and transmits the newly corresponding two IP addresses to the edge node 305.

Alternatively, the moving mobile station 310 notifies the new edge node 307 that the old edge node is the edge 10 node 306, so that the new edge node 307 transmits the newly corresponding two IP addresses to the old edge node 306, and the edge node 306 transmits the newly corresponding two IP addresses to the edge node 305 (the old edge node 306 knows from its own table that the mobile station 310 15 is communicating with the mobile station 309, and that the edge node of the mobile station 309 is the edge node 305). Using the method enables the edge node 306 to eliminate the table about the mobile station 310, which becomes unnecessary.

20 There is still another method in which in the foregoing two methods, the edge node 307 or edge node 306 notifies the location information server 300 to update the information about the mobile station 310 (notifies it of the newly corresponding two IP addresses), so that the 25 location information server 300 notifies the edge node 305 to update the information (table) about the mobile station 310 (notifies it of the newly corresponding two IP

addresses).

The edge node 305 updates its own table in accordance with the received newly corresponding two IP addresses such that the IP address of the mobile station 310 corresponds  
5 to the IP address of the edge node 307 (S802).

In the example of Fig. 17, the edge node 305 changes in its own table the IP address of the edge node the mobile station 310 visits from #6 to #7. After that, the edge node 305 transmits the data to which the IP address #10  
10 of the mobile station 310 is added with adding the IP address #7 of the edge node 307 to the data.

Fig. 19 is a block diagram illustrating an example of the second handover control in the mobile communications network of the third embodiment in accordance with the  
15 present invention, and Fig. 20 is a flowchart illustrating the example of the second handover control in the mobile communications network of the third embodiment in accordance with the present invention. The handover control will be described by means of an example in which  
20 the mobile station 310 moves from the supervisory area of the edge node 306 to that of the edge node 307.

Detecting that the broadcast IP address is different from the currently stored IP address, the mobile station 310 decides that its visiting area changes, and transmits  
25 its own IP address and the IP address of the new edge node to the old edge node (step S901). In the example of Fig. 19, the mobile station 310 transmits its own IP address

#10 and the IP address #7 of the new edge node 307 to the old edge node 306. The transmission to the edge node 306 is carried out through the edge node 307, repeater node 304, gate node 302 and repeater node 303, for example.

5       The old edge node creates a transfer table establishing the relationship between the IP address of the mobile station and the IP address of the new edge node (redirection edge node) (S902) so that when the old edge node thereafter receives data to which the IP address of  
10 the mobile station is added, it transmits (transfers) the data to the new edge node with adding the IP address of the new edge node to the data. In the example of Fig. 19, when receiving the data to which the IP address #10 of the mobile station 310 is added, the edge node 306 transmits  
15 the data to the edge node 307 with adding the IP address #7 of the edge node 307 to the data.

Using the second handover control can reduce the data (packet) loss as compared with using the first handover control.

20       In the second handover control, however, there is a possibility of transmission delay or aggregation because the data is transferred from the first visiting edge node of the mobile station. Therefore, it is possible to update the table of the party edge node as in the first handover  
25 control at some opportunity.

As for the opportunity for update, it is analogous to that of the first embodiment in accordance with the

present invention.

The update of the table of the party edge node is carried out by transmitting from the old edge node to the party edge node the IP address of the mobile station and the IP address of the new edge node. After transmitting the IP addresses, the old edge node releases its own transfer table and the like, which is preferably released after the old edge node receives the notification from the party edge node that the update of its table is completed, to prevent data (packet) loss.

Incidentally, when employing the method of accessing the location information server 300 every time the edge node receives a packet, it is unnecessary for the edge node to possess the table, and hence to update the table of the party edge node during the handover. In this case, the moving mobile station notifies the location information server 300 of its own IP address and the IP address of the new edge node so that the location information server 300 updates its own information in accordance with the IP addresses.

When handover takes place in the method in which the edge node updates its table by periodically accessing the location information server 300, the table of the party edge node can be either updated in the same manner as the foregoing method, or not updated at all. When it is not updated, a packet loss can occur from the time of the handover to the next periodic update.

#### EMBODIMENT 4

The fourth embodiment in accordance with the present invention also implements data transfer between mobile stations. The routing is carried out by the IP addresses of the mobile stations as in the second embodiment.

Fig. 21 is a block diagram showing a configuration of a mobile communications network of the fourth embodiment in accordance with the present invention.

10 The mobile communications network of the present embodiment comprises a gate node 402, repeater nodes 403 and 404, and edge nodes 405-408, but not a location information server 400. The functions of the nodes are the same as those of their counterparts in the second  
15 embodiment.

The gate node 402, repeater nodes 403 and 404, and edge nodes 405-408 have their own IP addresses (#2, #3, #4, and #5-#8, respectively, in the present embodiment), and mobile stations 409 and 410 also have their own IP  
20 addresses (#9 and #10 in the present embodiment).

The gate node 402 and the repeater nodes 403 and 404 are a routing node for carrying out routing of the data in accordance with routing information.

Fig. 22 is a flowchart illustrating part of a data  
25 transfer method between mobile stations in the mobile communications network of the fourth embodiment in accordance with the present invention.

Assume that a mobile station (409, for example) transmits data (IP packet) to the edge node (405, in this case) with adding the IP address (#10) of a party mobile station (410, for example) (step S1001).

5 Then, the edge node transmits the received data to the routing node (step S1002). In the example of Fig. 21, since each edge node is connected to only one repeater node as in the third embodiment, the data is transmitted to the corresponding one of the repeater nodes.

10 The subsequent routing of the data is analogous to that of the second embodiment. For example, the data transmitted from the mobile station 409 to the mobile station 410 is transmitted through the edge node 405, repeater node 403 and edge node 406, and arrives at the  
15 mobile station 410. The data transmission from the mobile station 410 to the mobile station 409 is carried out in a similar manner.

Fig. 23 is a block diagram illustrating an example of the first handover control in the mobile communications  
20 network of the fourth embodiment in accordance with the present invention, and Figs. 24A and 24B are a flowchart illustrating the example of the first handover control in the mobile communications network of the fourth embodiment in accordance with the present invention. The handover  
25 control will be described by means of an example in which the mobile station 410 moves from the supervisory area of the edge node 406 to that of the edge node 407.



Detecting that the broadcast IP address is different from the currently stored IP address, the mobile station 410 decides that its visiting area changes, and transmits its own IP address to the edge node (S1101). In the example  
5 of Fig. 23, the mobile station 410 transmits its own IP address to the edge node 407.

The new edge node transmits the IP address of the moving mobile station to the higher level routing node (repeater node or gate node) (step S1102). Receiving the  
10 IP address of the mobile station, the routing node updates its own routing information about the (IP address of the) mobile station (or creates the information about the mobile station when there is no existing information) (step S1103), and transmits the IP address of the mobile station to the  
15 still higher level routing node. The processing is repeated up to the junction routing node of the transmission route to the old edge node and the transmission route to the new edge node (steps S1104 and S1105).

In the example of Fig. 23, the higher level routing node of the new edge node is the repeater node 404, and the junction routing node of the transmission route to the old edge node (edge node 406) and the transmission route to the new edge node (edge node 407) is the gate node 402.  
20 Accordingly, the repeater node 404 and gate node 402 update the routing information about the (IP address of the) mobile station 410.  
25

Arriving at the junction routing node, the processing proceeds to step S1106. At step S1106, a decision is made as to whether the current node is the higher level routing node of the old edge node or not, and if the decision result is positive, the processing is completed. Otherwise, the IP address of the mobile station is transmitted to the lower level routing node directing to the old edge node (step S1107). The lower level routing node updates its own routing information about the IP address of the mobile station (step S1108). Specifically, when it receives the data addressed to the mobile station, it updates its own routing information such that the data is transmitted to its higher level routing node. Incidentally, it is also possible to eliminate the routing information about the mobile station at step S1108, in which case, each routing node transmits the received data to its higher level routing node if there is no routing information about the (IP address of the) mobile station. After step S1108, the processing proceeds to step S1106, again.

Fig. 25 is a block diagram illustrating an example of the second handover control in the mobile communications network of the fourth embodiment in accordance with the present invention, and Fig. 26 is a flowchart illustrating the example of the second handover control in the mobile communications network of the fourth embodiment in accordance with the present invention. The handover control will be described by means of an example in which

the mobile station 410 moves from the supervisory area of the edge node 406 to that of the edge node 407.

Detecting that the broadcast IP address is different from the currently stored IP address, the mobile station  
5 410 decides that its visiting area changes, and transmits its own IP address and the IP address of the new edge node to the old edge node (step S1201). In the example of Fig. 25, the mobile station 410 transmits its own IP address #10 and the IP address #7 of the edge node 407 to the edge  
10 node 406. The transmission to the old edge node 406 is carried out by placing the transmission route information into the routing information of each routing node, for the IP addresses of the individual edge nodes as illustrated in Fig. 25.

15 The old edge node creates a transfer table establishing the relationship between the IP address of the mobile station and the IP address of the new edge node (redirection edge node) (S1202) so that when it thereafter receives data to which the IP address of the mobile station  
20 is added, it transmits (transfers) the data to the new edge node with adding the IP address of the new edge node to the data. In the example of Fig. 25, when receiving the data to which the IP address #10 of the mobile station 410 is added, the old edge node 406 transmits the data to the  
25 new edge node 407 with adding the IP address #7 of the edge node 407 to the data. The transmission to the new edge node 407 is carried out by placing the transmission route

information about the IP address of the edge node into the routing information of each routing node as described above.

In the second handover control, however, there is a possibility of transmission delay or aggregation because the data is transferred from the first visiting edge node of the mobile station. Therefore, it is possible to update the table of the routing node as in the first handover control at some opportunity.

As for the opportunity for update, it is analogous to that of the first embodiment in accordance with the present invention.

The update of the routing information is carried out from the higher level routing node of the new edge node toward the junction node, and then from the junction node toward the higher level routing node of the old edge node as in the first handover control, for example. The release of the transfer table of the old edge node is preferably carried out after the update of the routing information of its higher level routing node is completed to prevent the data (packet) loss.

#### SUPPLEMENTS

A mobile communications network and a data delivery method can be implemented that have combined functions described in the foregoing embodiments (for example, those having the functions of the first and third embodiments).

Although the foregoing description separately explains the method of carrying out the routing in accordance with the IP address of the edge node (the first and third embodiments) and the method of carrying out the routing in accordance with the IP address of the mobile station (the second and fourth embodiments), a routing method combining the two methods is possible.

As described above, the present invention can implement the connectionless network and connectionless transfer with obviating the need for sending the call control signal in the data delivery in the mobile communications network.

In addition, it can prevent the network aggregation involved in delivering the same data to the users of the same group, thereby reducing the load of the data delivery server.

Moreover, it can implement control such as handover in such a connectionless network.

WHAT IS CLAIMED IS:

1. A mobile communications network comprising:

one or more routing nodes for receiving data to which  
5 the IP address of a mobile station is added, and for  
carrying out routing of the data in accordance with routing  
information; and

one or more edge nodes for receiving the data routed  
by said routing nodes, and for transmitting the data to  
10 the mobile station corresponding to the IP address of the  
mobile station added to the data.

2. The mobile communications network as claimed in claim  
1, further comprising:

15 a location information server for managing  
information about correspondence between the IP address  
of the mobile station and the IP address of the edge node  
that supervises the area visited by the mobile station,  
wherein

20 said routing nodes include a gate node;

said gate node retrieves, by accessing said location  
information server, the IP address of the edge node  
supervising the area visited by the mobile station  
corresponding to the IP address of the mobile station added  
25 to the received data, and adds the IP address of the edge  
node to the received data;

said routing information includes information about

correspondence between the IP address of the edge node and the transmission route; and

said routing nodes carry out the routing of the received data in accordance with the IP address of the edge node added to the received data and the routing information.

3. The mobile communications network as claimed in claim 2, wherein the IP address of a group of mobile stations can be added as the IP address of the mobile station to be added to the data, wherein

said location information server manages information about correspondence between the IP addresses of the mobile stations belonging to the group and the IP address of the group of the mobile stations;

said gate node retrieves, when the IP address of the group of the mobile stations is added to the received data, the IP addresses of the edge nodes supervising the areas visited by the mobile stations corresponding to the IP address of the group of the mobile stations by accessing said location information server, replicates the received data by the number of the edge nodes, adds to each of the data the IP address of each of the edge nodes and the IP addresses of the mobile stations visiting the supervisory area of the edge node, and carries out the routing of the data.

4. The mobile communications network as claimed in claim 2 or 3, wherein when said mobile station moves from the supervisory area of an old edge node to the supervisory area of a new edge node, said moving mobile station notifies  
5 said location information server of its own IP address and the IP address of the new edge node; and said location information server updates information about correspondence between the IP address of the moving mobile station and the IP address of the edge node supervising  
10 the area visited by the moving mobile station.

5. The mobile communications network as claimed in claim 2 or 3, wherein when said mobile station moves from the supervisory area of an old edge node to the supervisory  
15 area of a new edge node, said moving mobile station transmits its own IP address and the IP address of the new edge node to the old edge node; and when said old edge node thereafter receives data to which the IP address of the moving mobile station is added, said old edge node  
20 transmits the data to said new edge node with adding the IP address of the new edge node to the data.

6. The mobile communications network as claimed in claim 1, wherein  
25 said routing information includes information about correspondence between the IP address of the mobile station and the transmission route, and wherein



said routing nodes carry out the routing of the received data in accordance with the IP address of the mobile station added to the received data and the routing information.

5

7. The mobile communications network as claimed in claim 6, wherein the IP address of a group of mobile stations can be added as the IP address of the mobile station to be added to the data, and wherein

10

said routing nodes have group information which is information about correspondence between the IP addresses of the mobile stations belonging to the group and the IP address of the group of the mobile stations, replicate, when the IP address of the group of the mobile stations is added to the received data, the received data by the

15

number of the transmission routes corresponding to the IP addresses of the mobile stations corresponding to the added IP address of the group of the mobile stations in accordance with the group information and the routing information and

20

carry out the routing of the data.

8. The mobile communications network as claimed in claim 6 or 7, wherein the IP address of the mobile station to be added to the data can include the IP addresses of a plurality of mobile stations, wherein

25

said routing nodes replicate, when the IP addresses of the plurality of the mobile stations are added to the

received data, the received data by the number of the  
transmission routes corresponding to the IP addresses of  
the plurality of the mobile stations in accordance with  
the routing information, add to each of the data, the IP  
5 addresses of the mobile stations corresponding to each of  
the transmission routes, and carry out the routing of the  
data.

9. The mobile communications network as claimed in any  
10 one of claims 6-8, wherein said mobile station, when it  
moves from the supervisory area of an old edge node to the  
supervisory area of a new edge node, transmits its own IP  
address to said new edge node, and wherein each node from  
the higher level routing node of said new edge node up to  
15 the junction routing node from which the transmission  
routes diverge to said old edge node and to said new edge  
node, updates its own routing information about the moving  
mobile station.

20 10. The mobile communications network as claimed in any  
one of claims 6-8, wherein said routing information  
includes information about correspondence between the IP  
address of the edge node and the transmission route, and  
wherein

25 said routing nodes carry out the routing of the  
received data in accordance with the IP address of the edge  
node added to the received data and the routing

information; and

said mobile station notifies, when it moves from the supervisory area of an old edge node to the supervisory area of a new edge node, said old edge node of its own IP address and the IP address of the new edge node, and said  
5 old edge node transmits, when it thereafter receives data to which the IP address of the moving mobile station is added, the data to said new edge node with adding the IP address of the new edge node to the data.

10

11. The mobile communications network as claimed in any one of claims 1-10, further comprising a data delivery server for delivering data, wherein said data delivery server delivers data to said mobile station in response  
15 to a request from said mobile station.

12. The mobile communications network as claimed in claim 1, further comprising:

a location information server for managing  
20 information about correspondence between the IP address of the mobile station and the IP address of the edge node that supervises the area visited by the mobile station, wherein

each of said edge nodes receives data which is  
25 transmitted by a mobile station visiting its own supervisory area and to which the IP address of the mobile station is added, retrieves by accessing said location

information server the IP address of the edge node supervising the area visited by the mobile station corresponding to the IP address of the mobile station added to the received data, adds the IP address of the edge node to the received data, and transmits the data to said routing node;

said routing information includes information about correspondence between the IP address of the edge node and the transmission route; and

10       said routing nodes carry out the routing of the received data in accordance with the IP address of the edge node added to the received data and the routing information.

15       13. The mobile communications network as claimed in claim 12, wherein said edge node generates and manages information about correspondence between the IP address of the mobile station added to the received data and the IP address of the edge node supervising the area visited  
20       by the mobile station.

14. The mobile communications network as claimed in claim 13, wherein when said mobile station moves from the supervisory area of an old edge node to the supervisory  
25       area of a new edge node during communication with another mobile station, said moving mobile station transmits its own IP address and the IP address of the new edge node to

the edge node supervising the area visited by the party mobile station; and said edge node updates information about correspondence between the IP address of the moving mobile station and the IP address of the edge node supervising the area visited by the moving mobile station.

15. The mobile communications network as claimed in claim 13, wherein when said mobile station moves from the supervisory area of an old edge node to the supervisory area of a new edge node, said moving mobile station transmits its own IP address and the IP address of the new edge node to the old edge node; and when said old edge node thereafter receives data to which the IP address of the moving mobile station is added, said old edge node transmits the data to said new edge node with adding the IP address of the new edge node to the data.

16. The mobile communications network as claimed in claim 12, wherein when said mobile station moves from the supervisory area of an old edge node to the supervisory area of a new edge node, said moving mobile station notifies said location information server of its own IP address and the IP address of the new edge node; and said location information server updates information about correspondence between the IP address of the moving mobile station and the IP address of the edge node supervising the area visited by the moving mobile station.

17. The mobile communications network as claimed in claim 1, wherein

each of said edge nodes receives data which is  
5 transmitted by a mobile station visiting its own  
supervisory area and to which the IP address of the mobile  
station is added, and transmits the data to said routing  
node;

said routing information includes information about  
10 correspondence between the IP address of the mobile station  
and the transmission route; and

said routing nodes carry out the routing of the  
received data in accordance with the IP address of the  
mobile station added to the received data and the routing  
15 information.

18. The mobile communications network as claimed in claim  
17, wherein said mobile station, when it moves from the  
supervisory area of an old edge node to the supervisory  
20 area of a new edge node, transmits its own IP address to  
said new edge node, and wherein each node from the higher  
level routing node of said new edge node up to the junction  
routing node from which the transmission routes diverge  
to said old edge node and to said new edge node, and from  
25 the junction routing node to the higher routing node of  
said old edge node, updates its own routing information  
about the moving mobile station.

19. The mobile communications network as claimed in claim  
17, wherein said routing information includes information  
about correspondence between the IP address of the edge  
5 node and the transmission route, and wherein

said routing nodes carry out the routing of the  
received data in accordance with the IP address of the edge  
node added to the received data and the routing  
information; and

10 said mobile station notifies, when it moves from the  
supervisory area of an old edge node to the supervisory  
area of a new edge node, said old edge node of its own IP  
address and the IP address of the new edge node, and said  
old edge node transmits, when it thereafter receives data  
15 to which the IP address of the moving mobile station is  
added, the data to said new edge node with adding the IP  
address of the new edge node to the data.

20 20. A data delivery method in a mobile communications  
network including one or more routing nodes and one or more  
edge nodes, said data delivery method comprising the steps  
of:

receiving, at one of said routing nodes, data to which  
the IP address of a mobile station is added, and carrying  
25 out routing of the data in accordance with routing  
information; and

receiving, at one of said edge nodes, the data routed





## ABSTRACT OF THE DISCLOSURE

A mobile communications network and data delivery method in a mobile communications network is provided that  
5 can implement connectionless transfer in the mobile communications network, and obviate the need for sending a call control signal for data delivery. An IP address is assigned to each of the nodes of the mobile communications network including routing nodes (a gate  
10 node and repeater node, for example) and edge nodes and to each mobile station. A routing node, receiving data including the IP address of a mobile station, carries out routing of the data in accordance with routing information. The edge node that receives the data routed by the routing  
15 node, transmits the data to the mobile station corresponding to the IP address of the mobile station added to the data. The IP addresses are also applicable to delivering data to users of the same group, or carrying out control like handover.

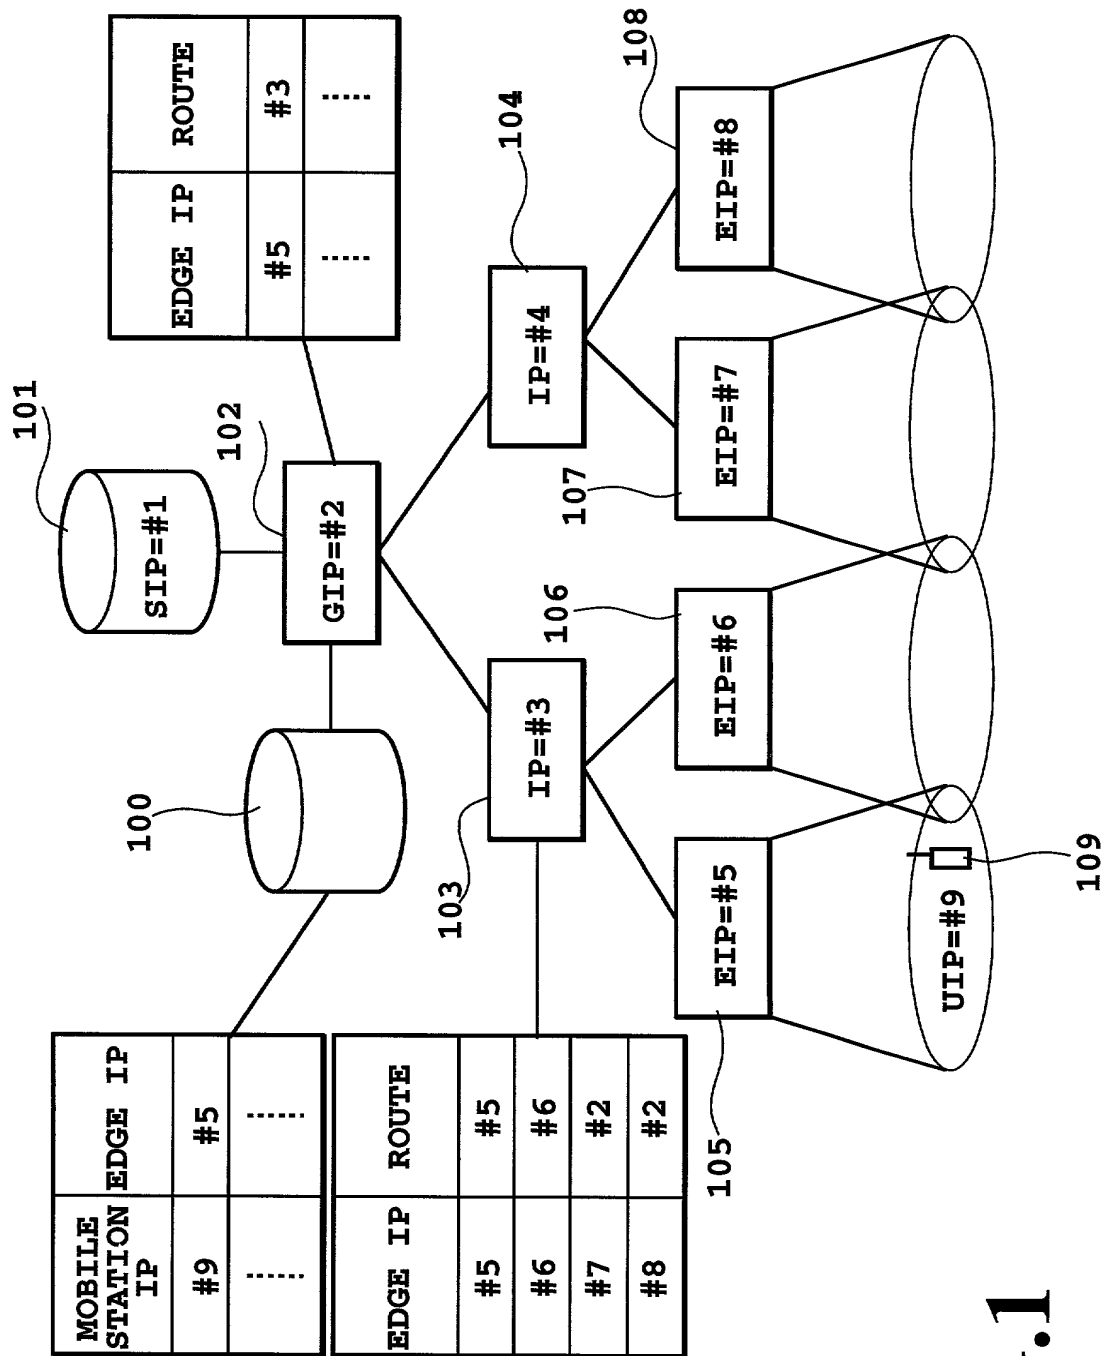


FIG.1

2/27

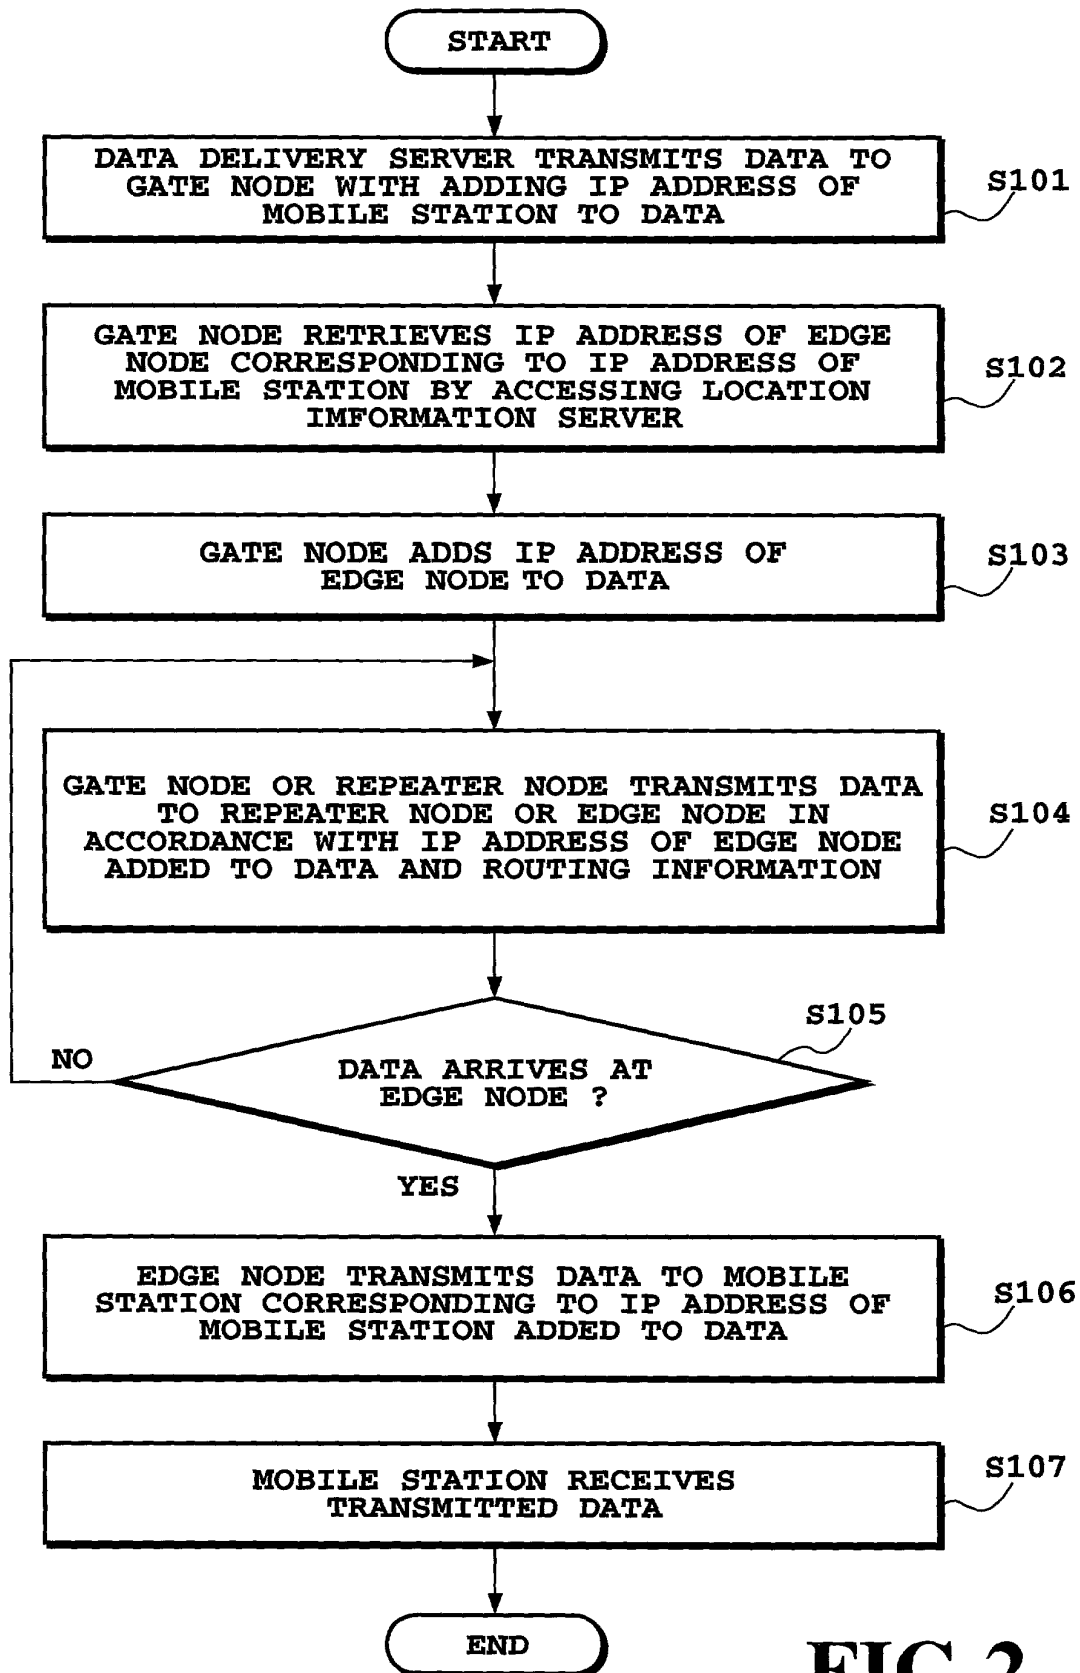
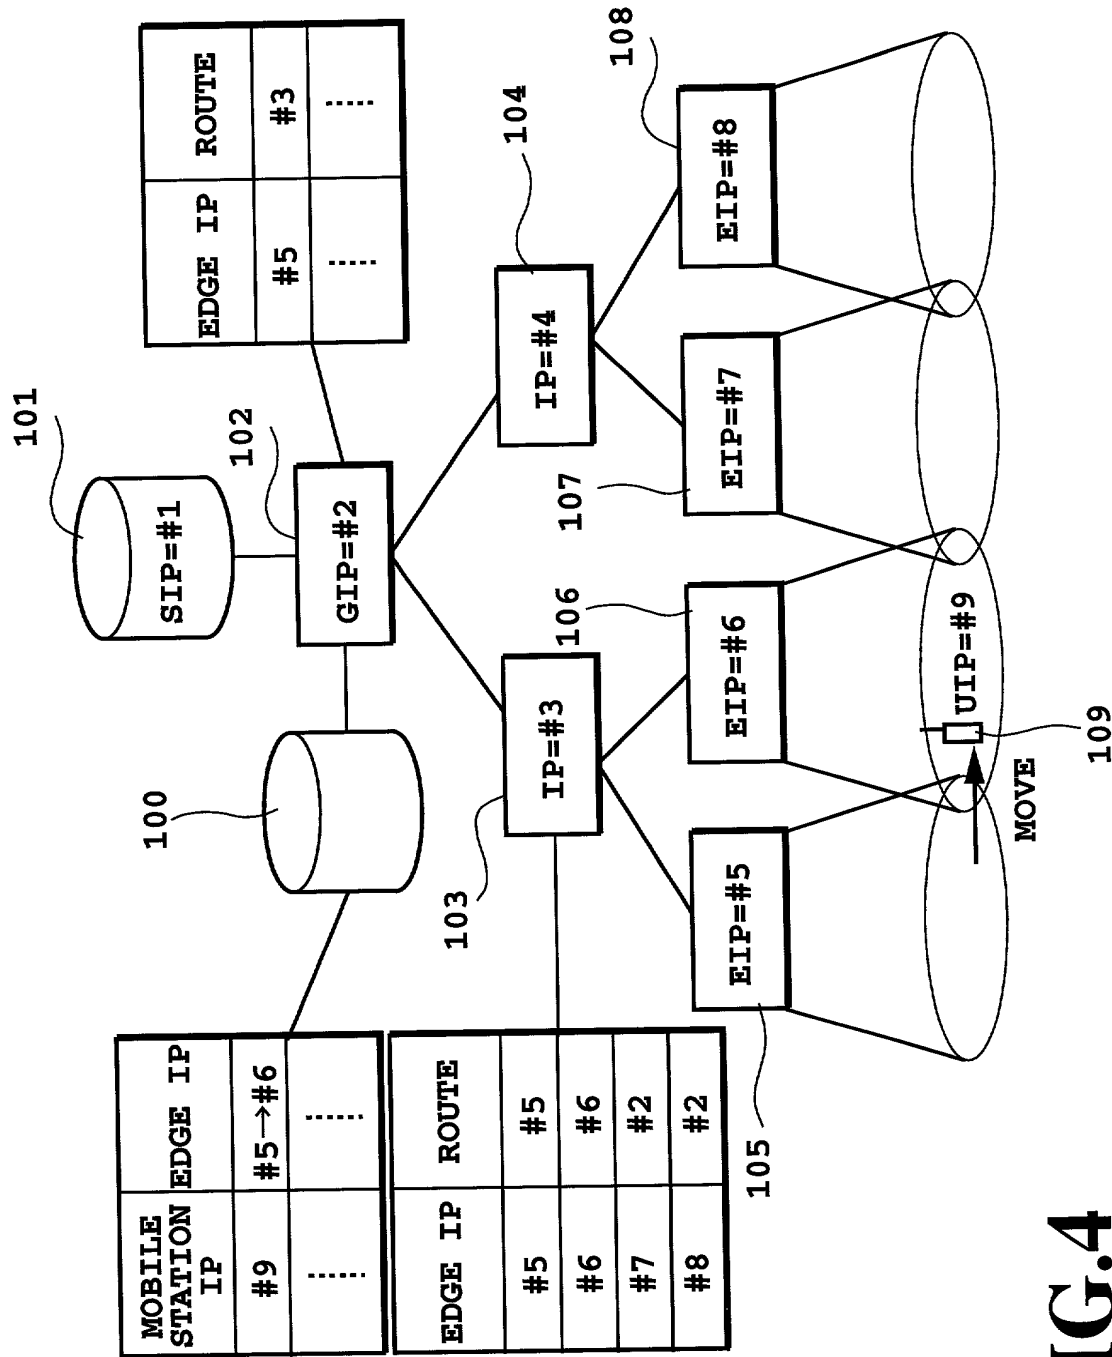


FIG.2

3/27

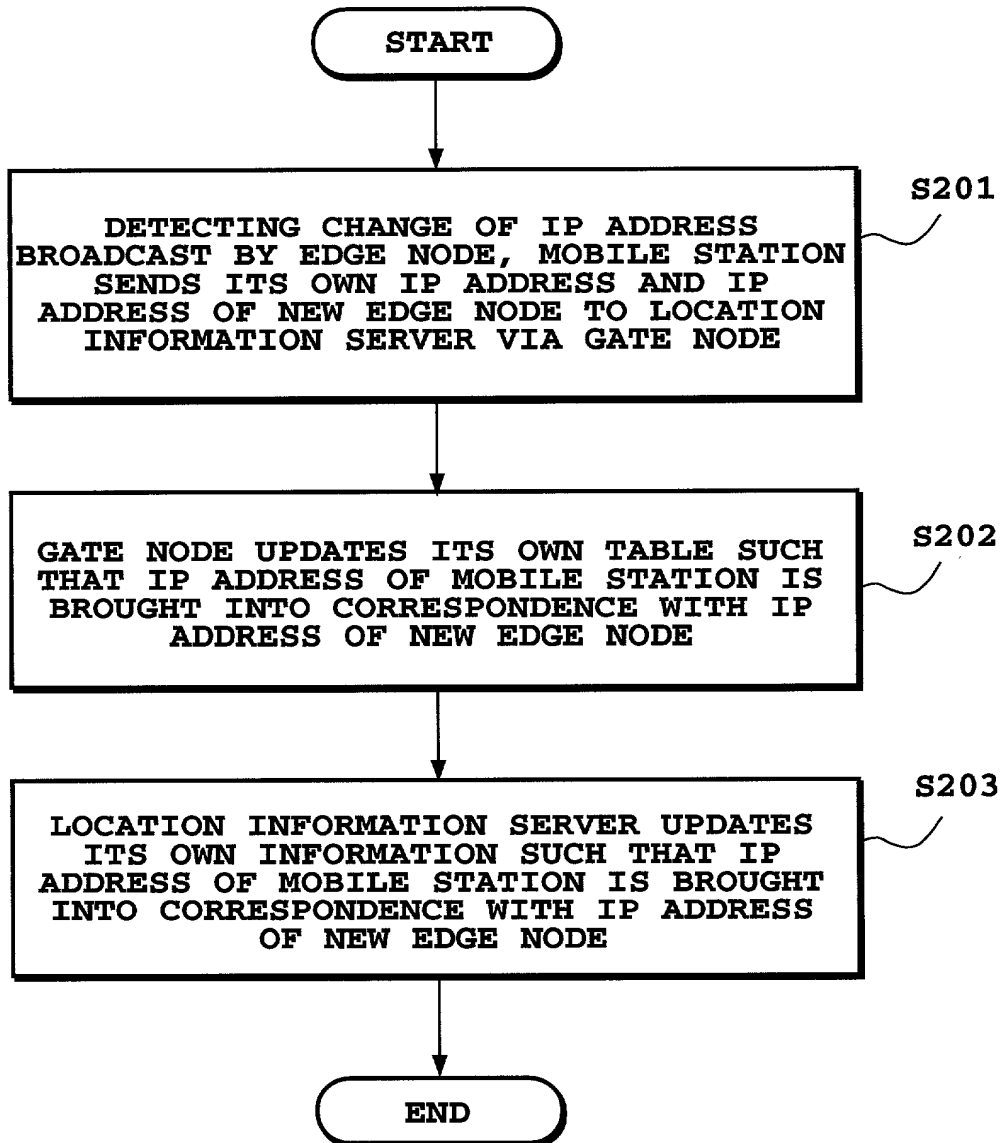
UD	UIP	DGA	UI
----	-----	-----	----

**FIG.3**



**FIG. 4**

5/27

**FIG.5**

6/27

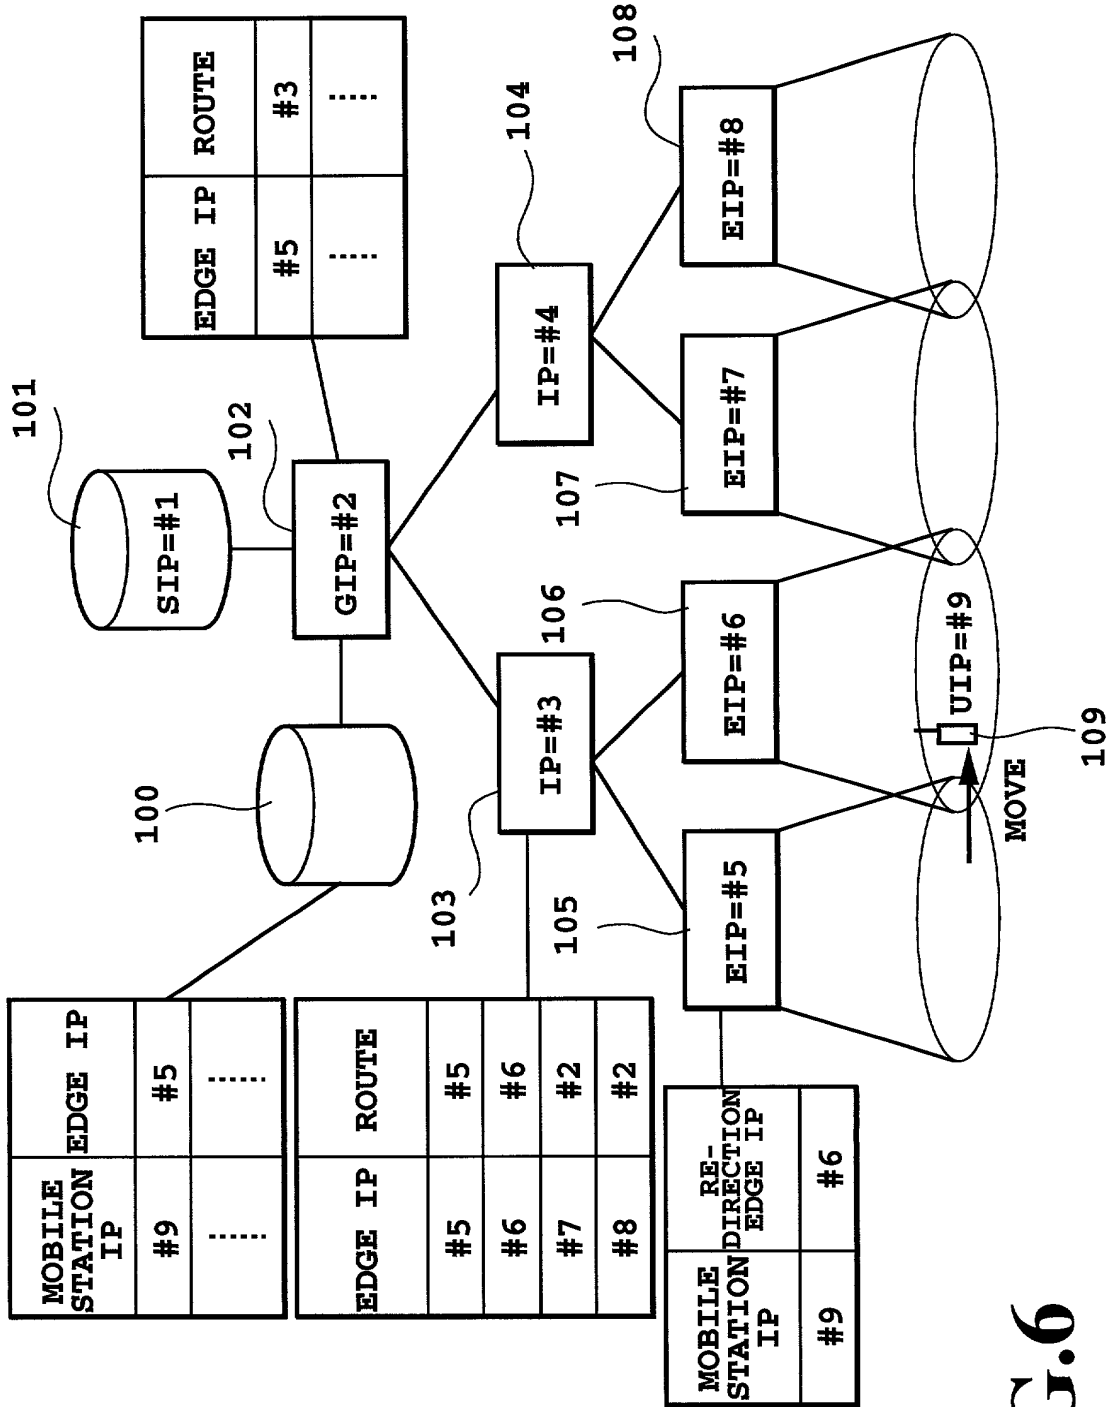
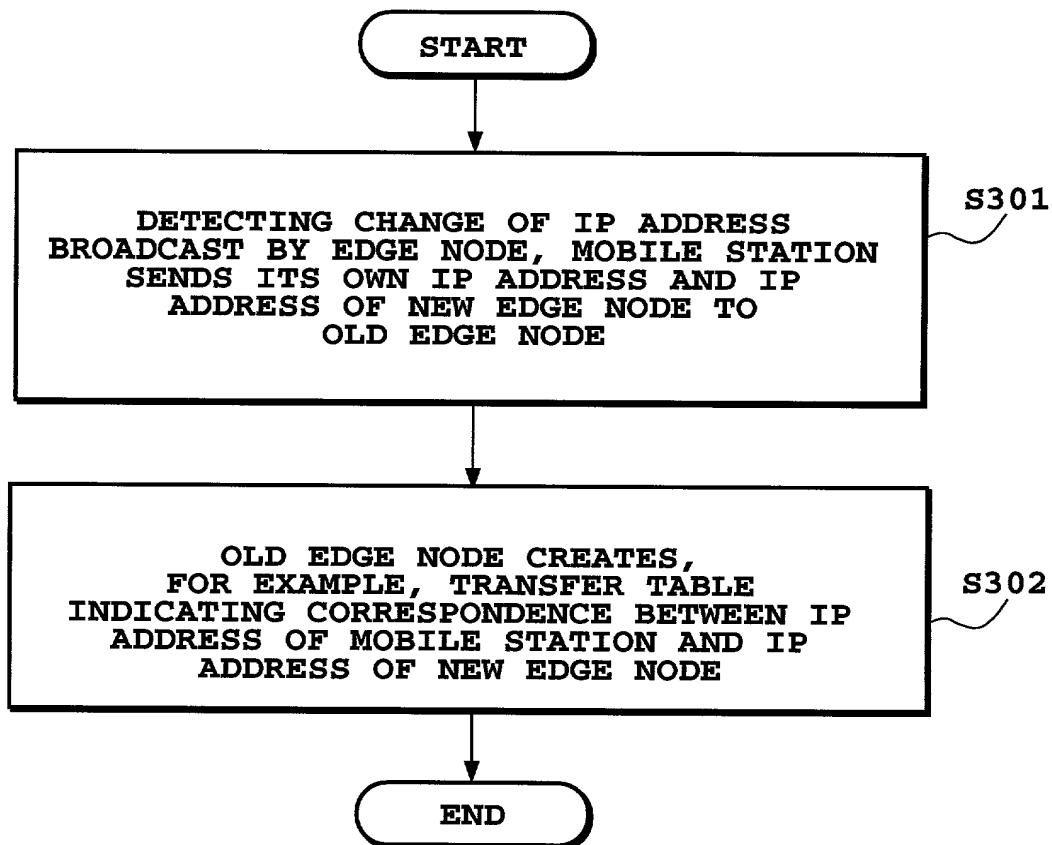


FIG.6

7/27

**FIG.7**



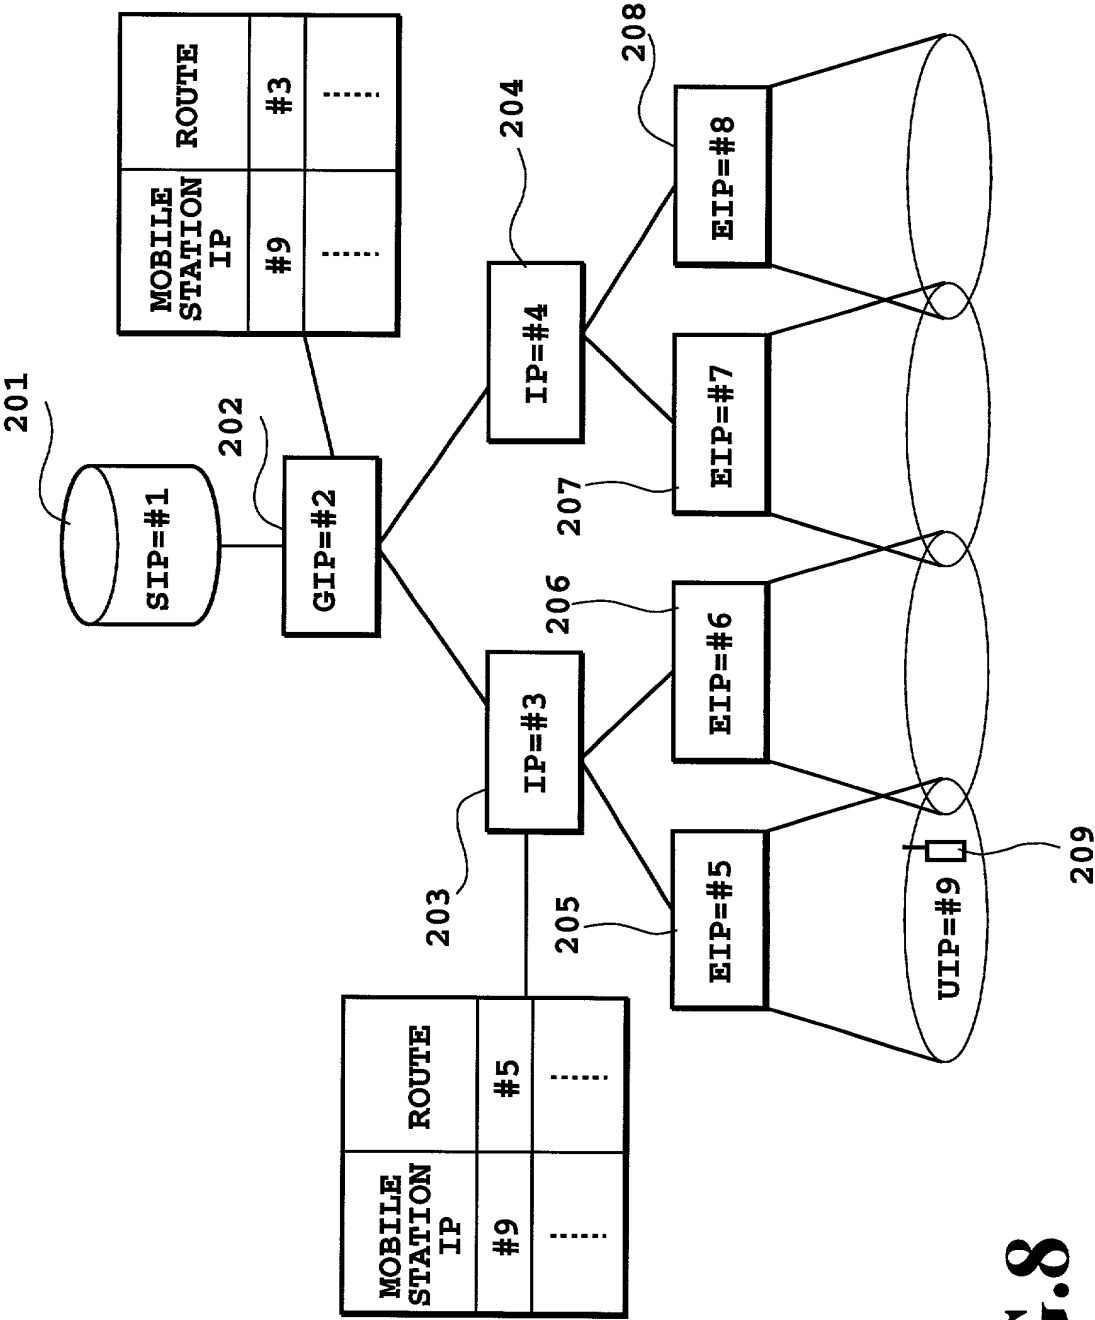
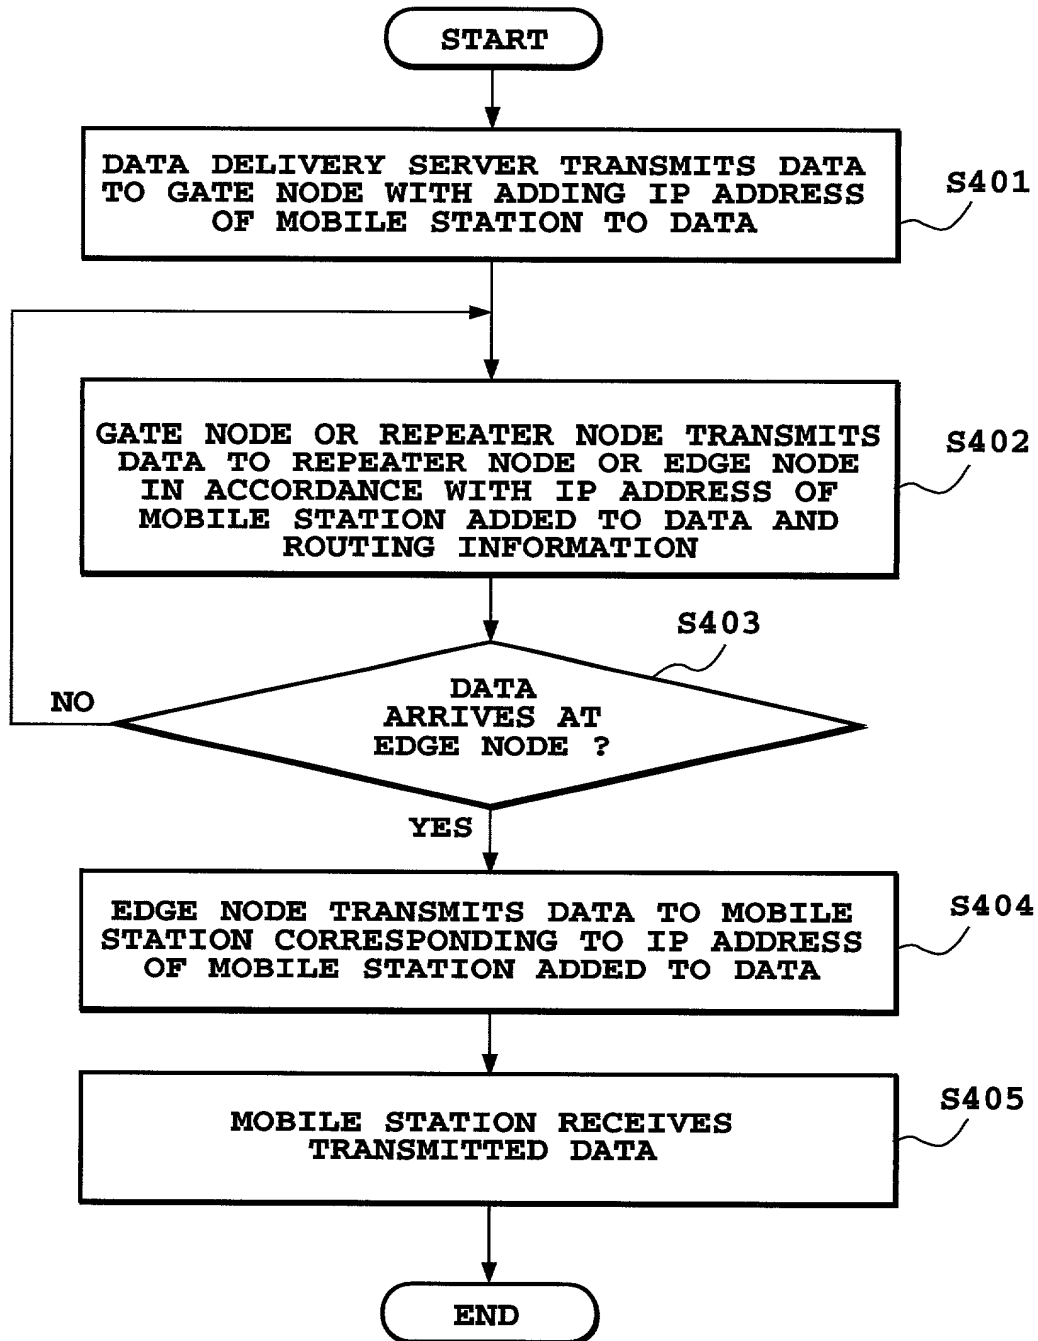


FIG.8

9/27

**FIG.9**

10/27

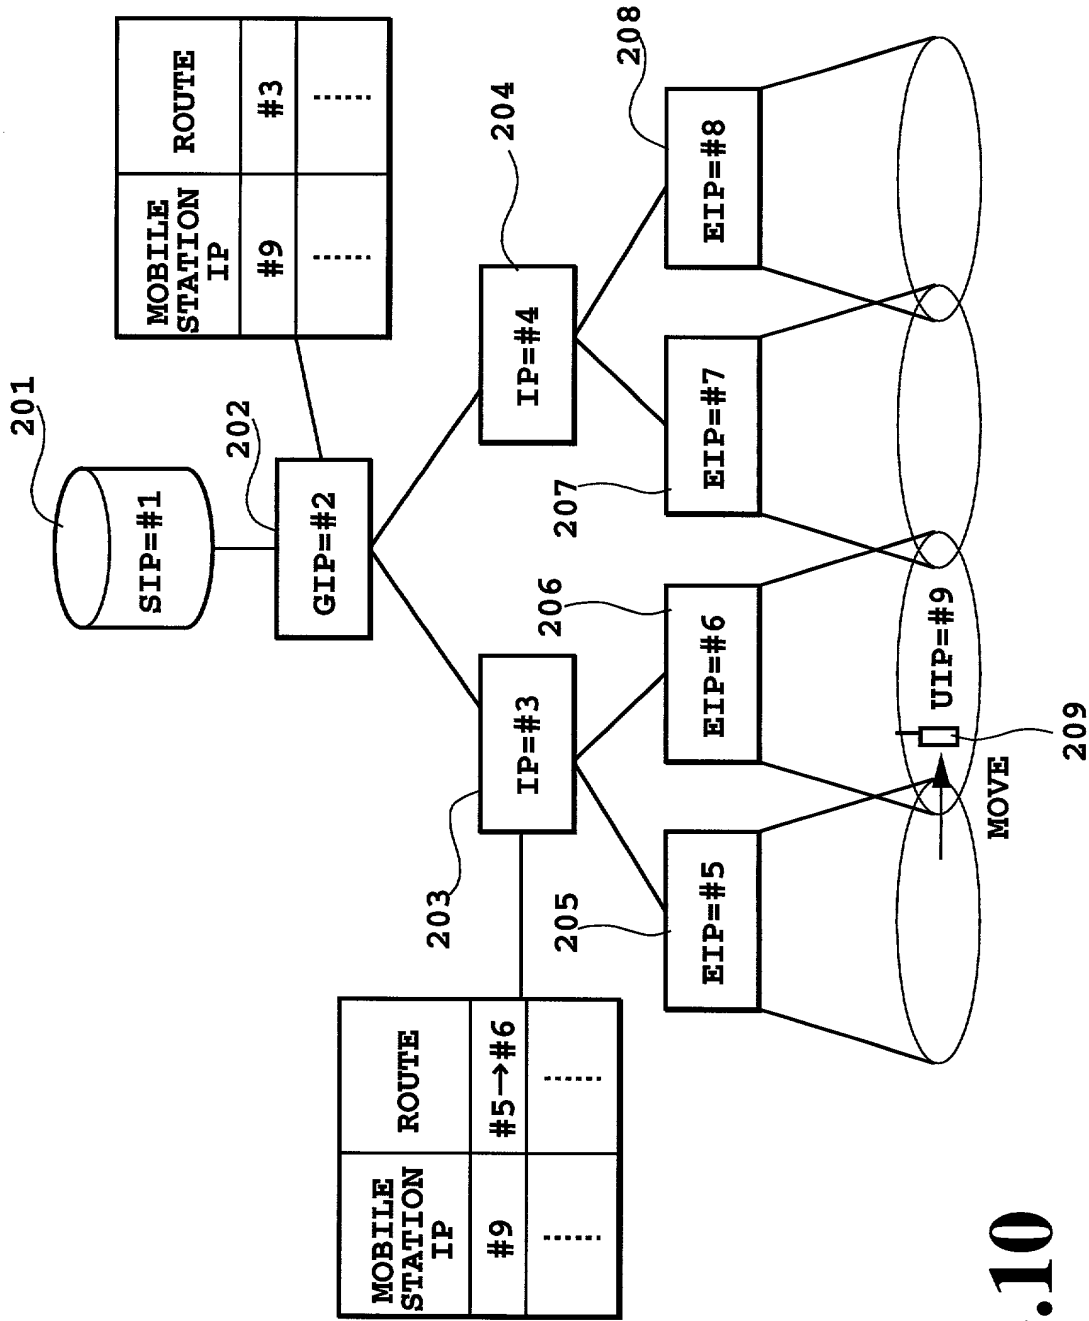
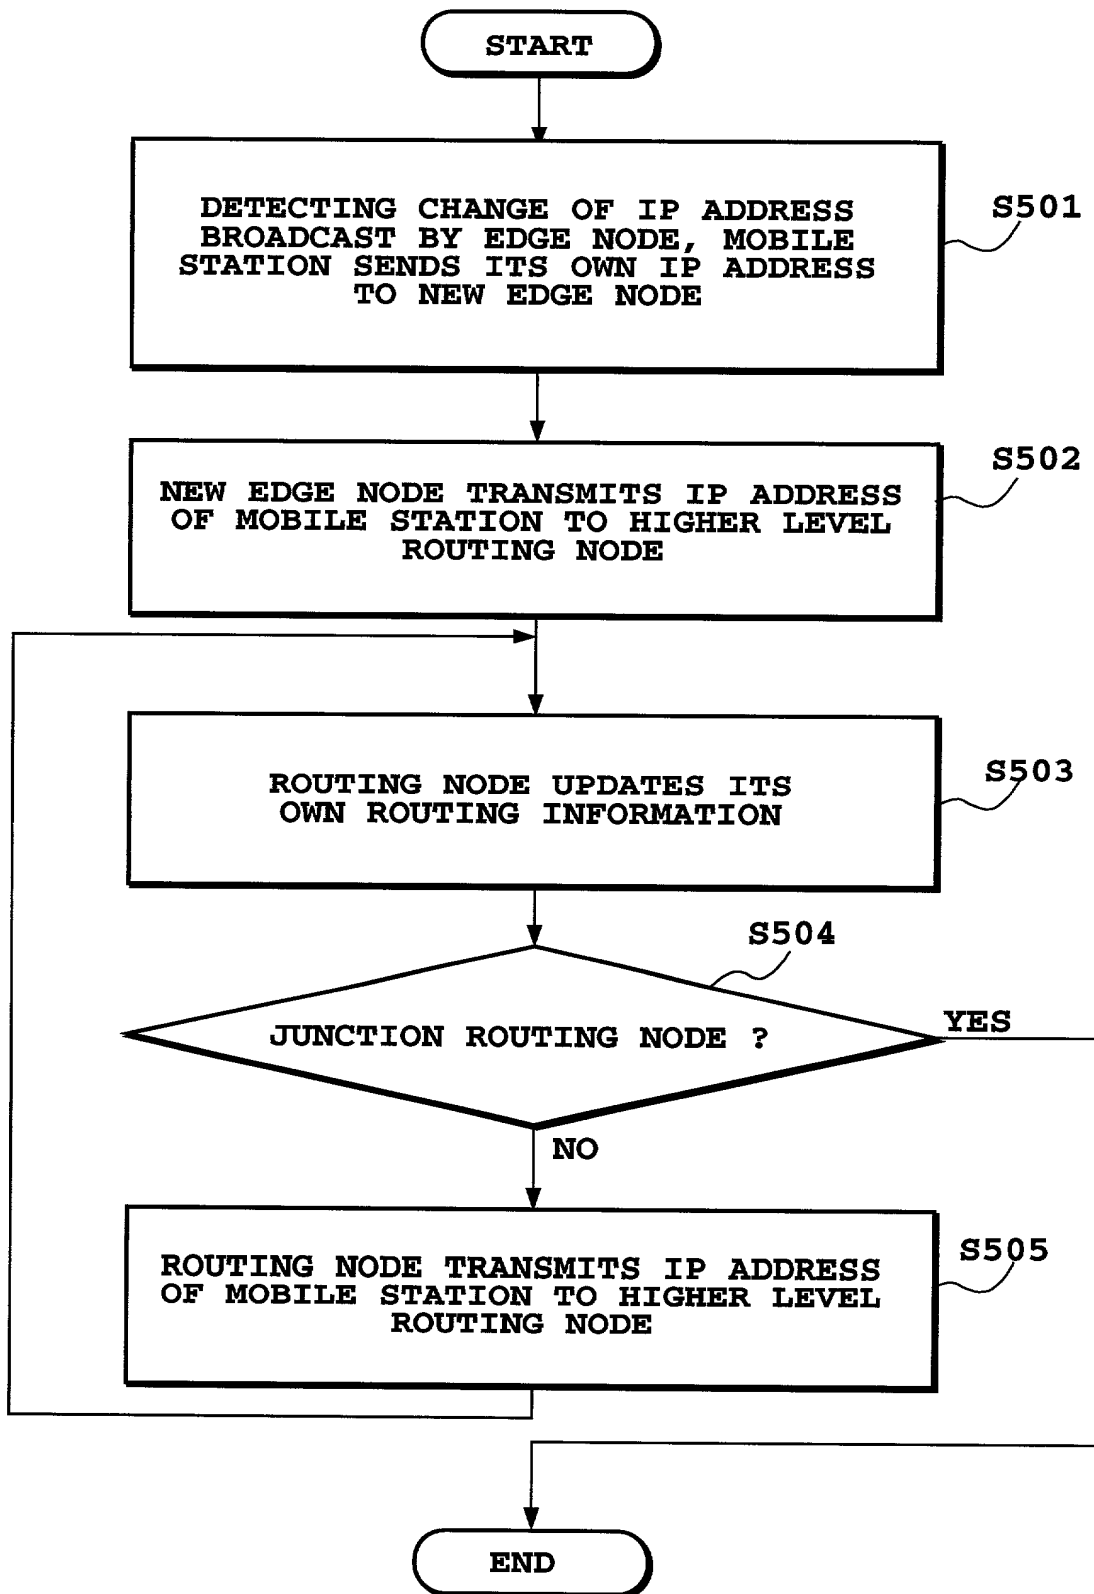


FIG.10

11/27

**FIG.11**

12/27

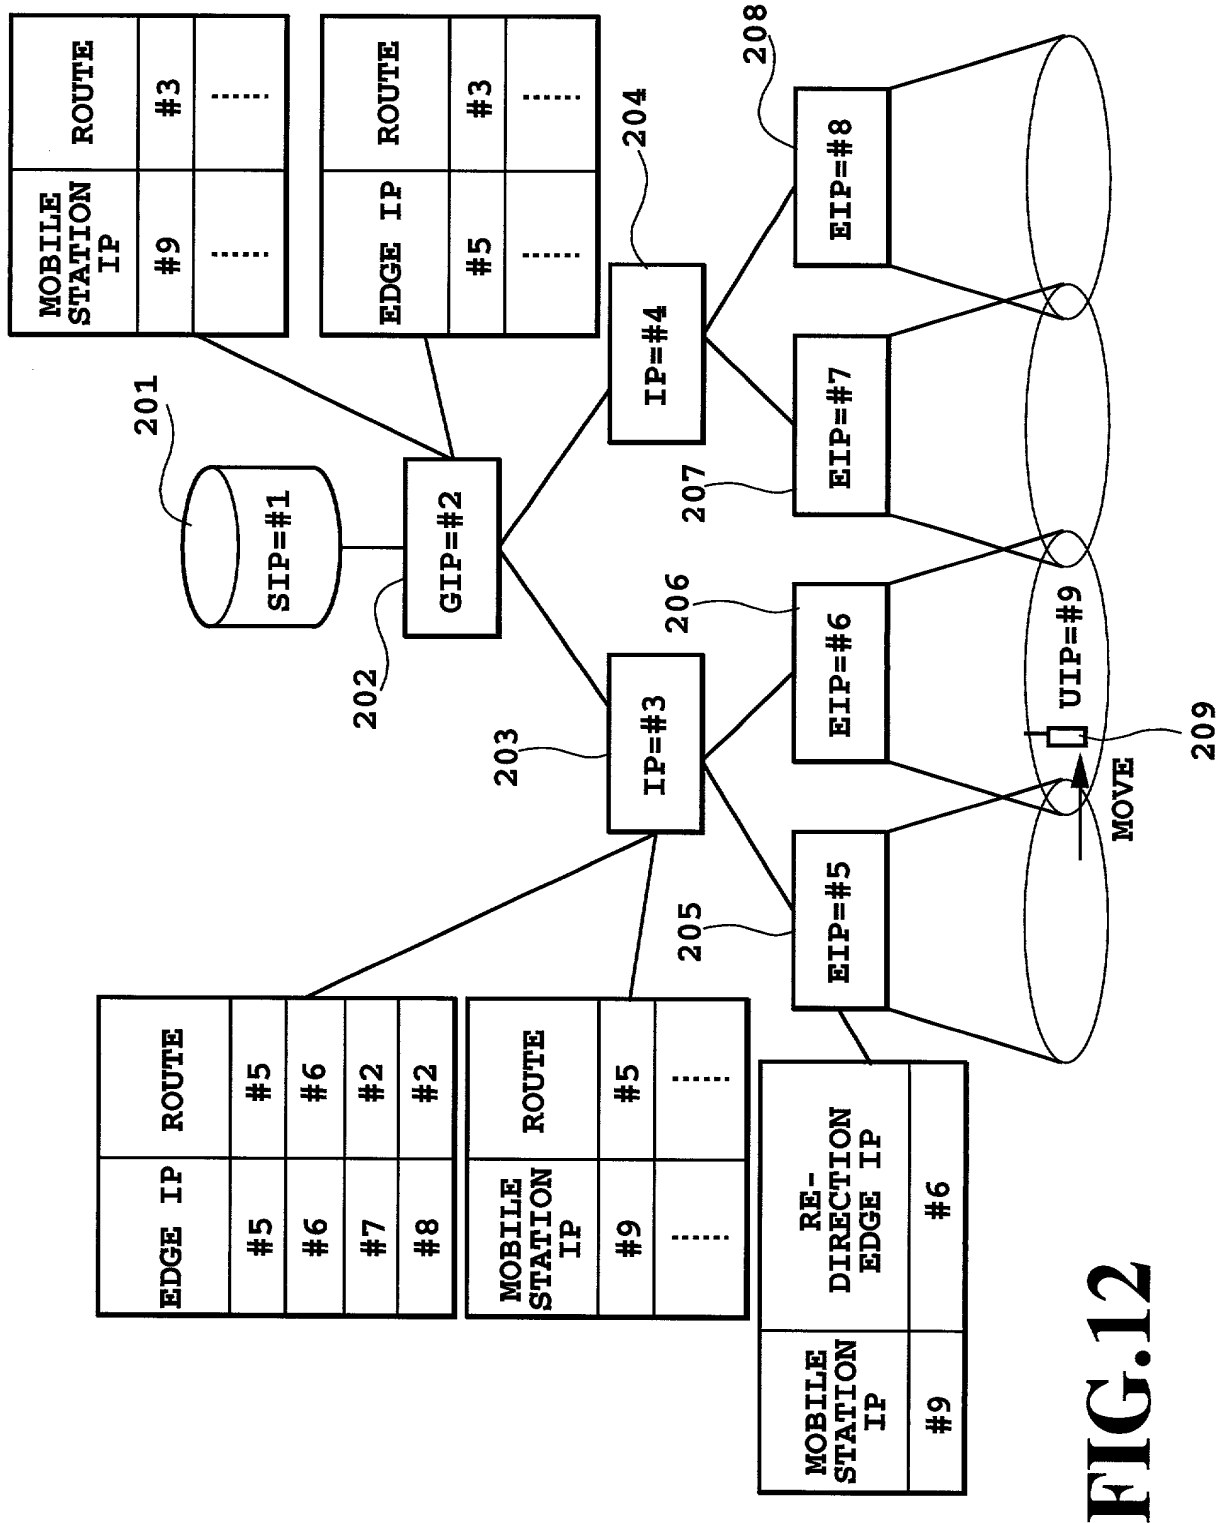
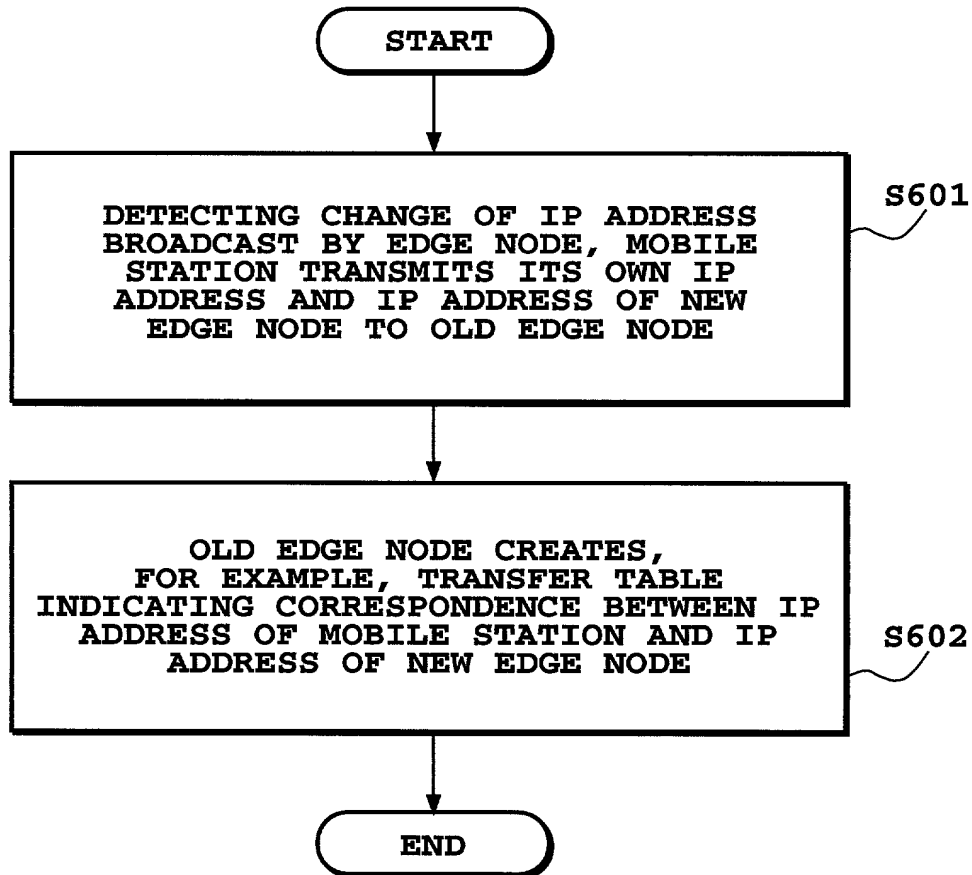


FIG.12

13/27

**FIG.13**


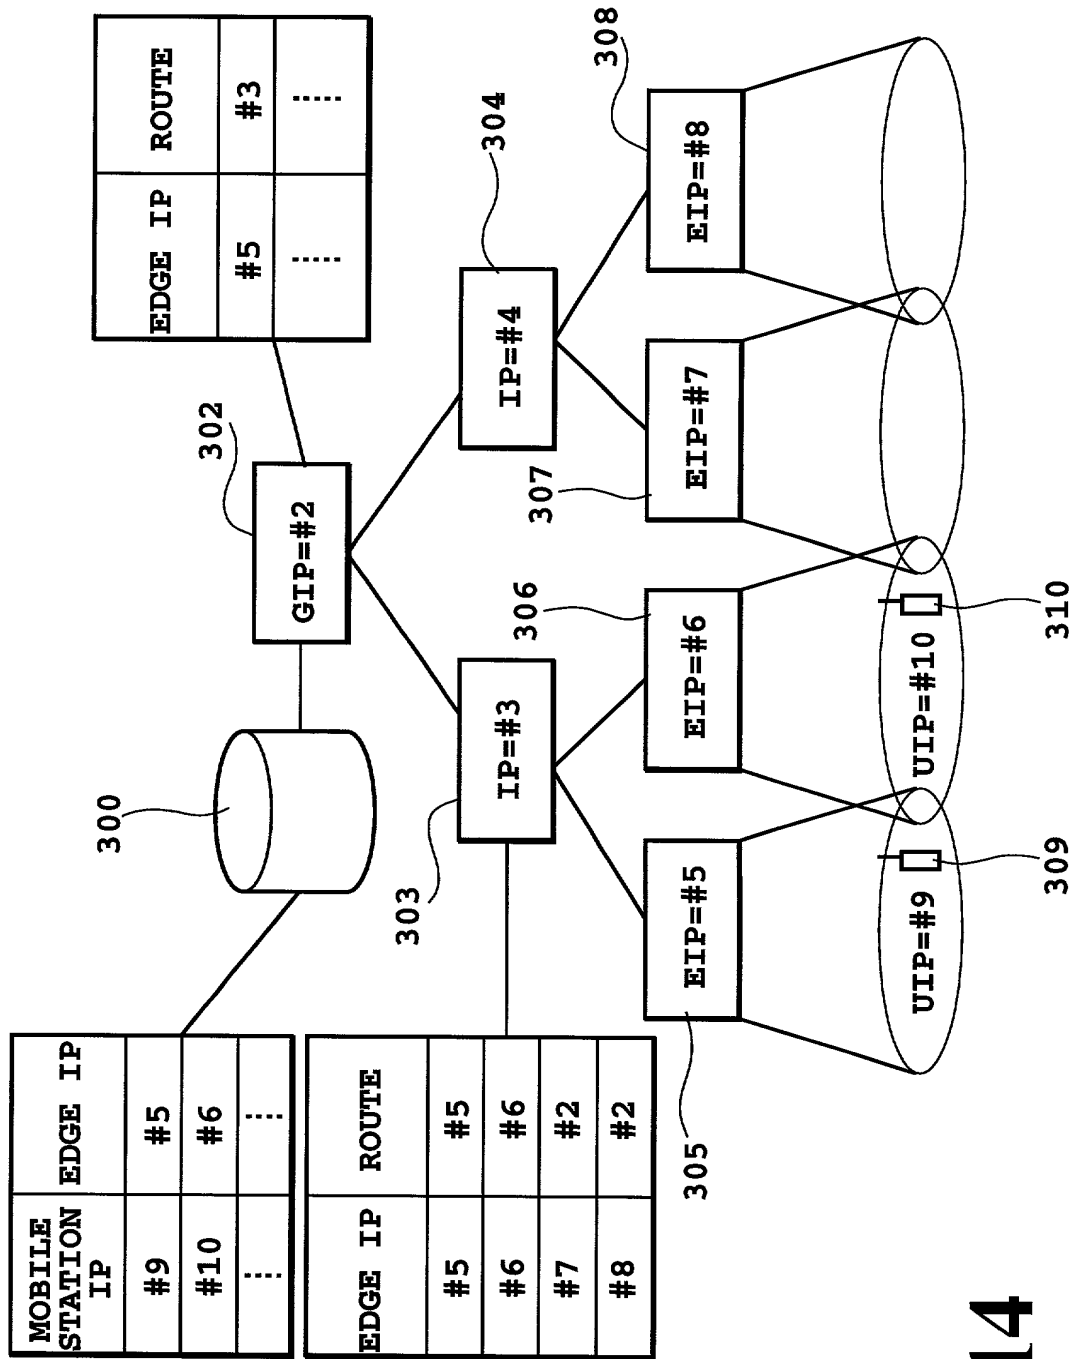


FIG.14

15/27

**FIG.15**



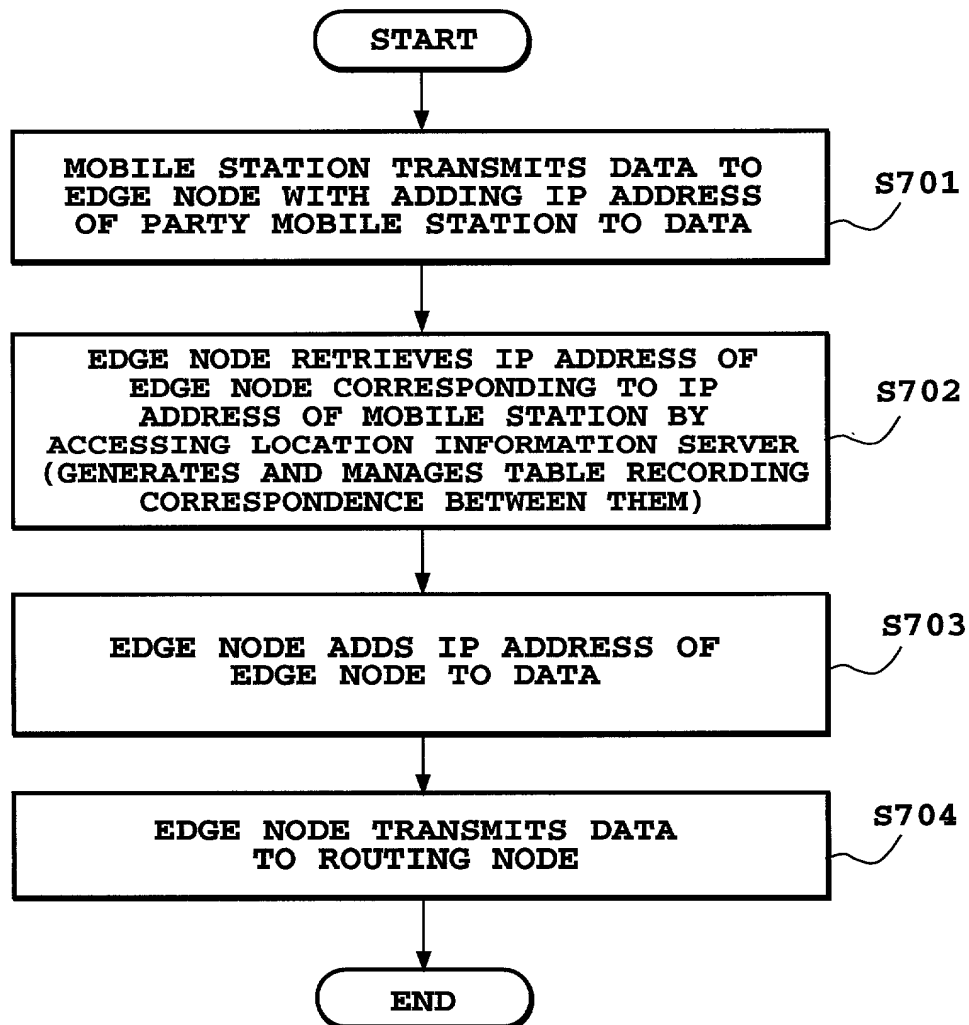

17/27

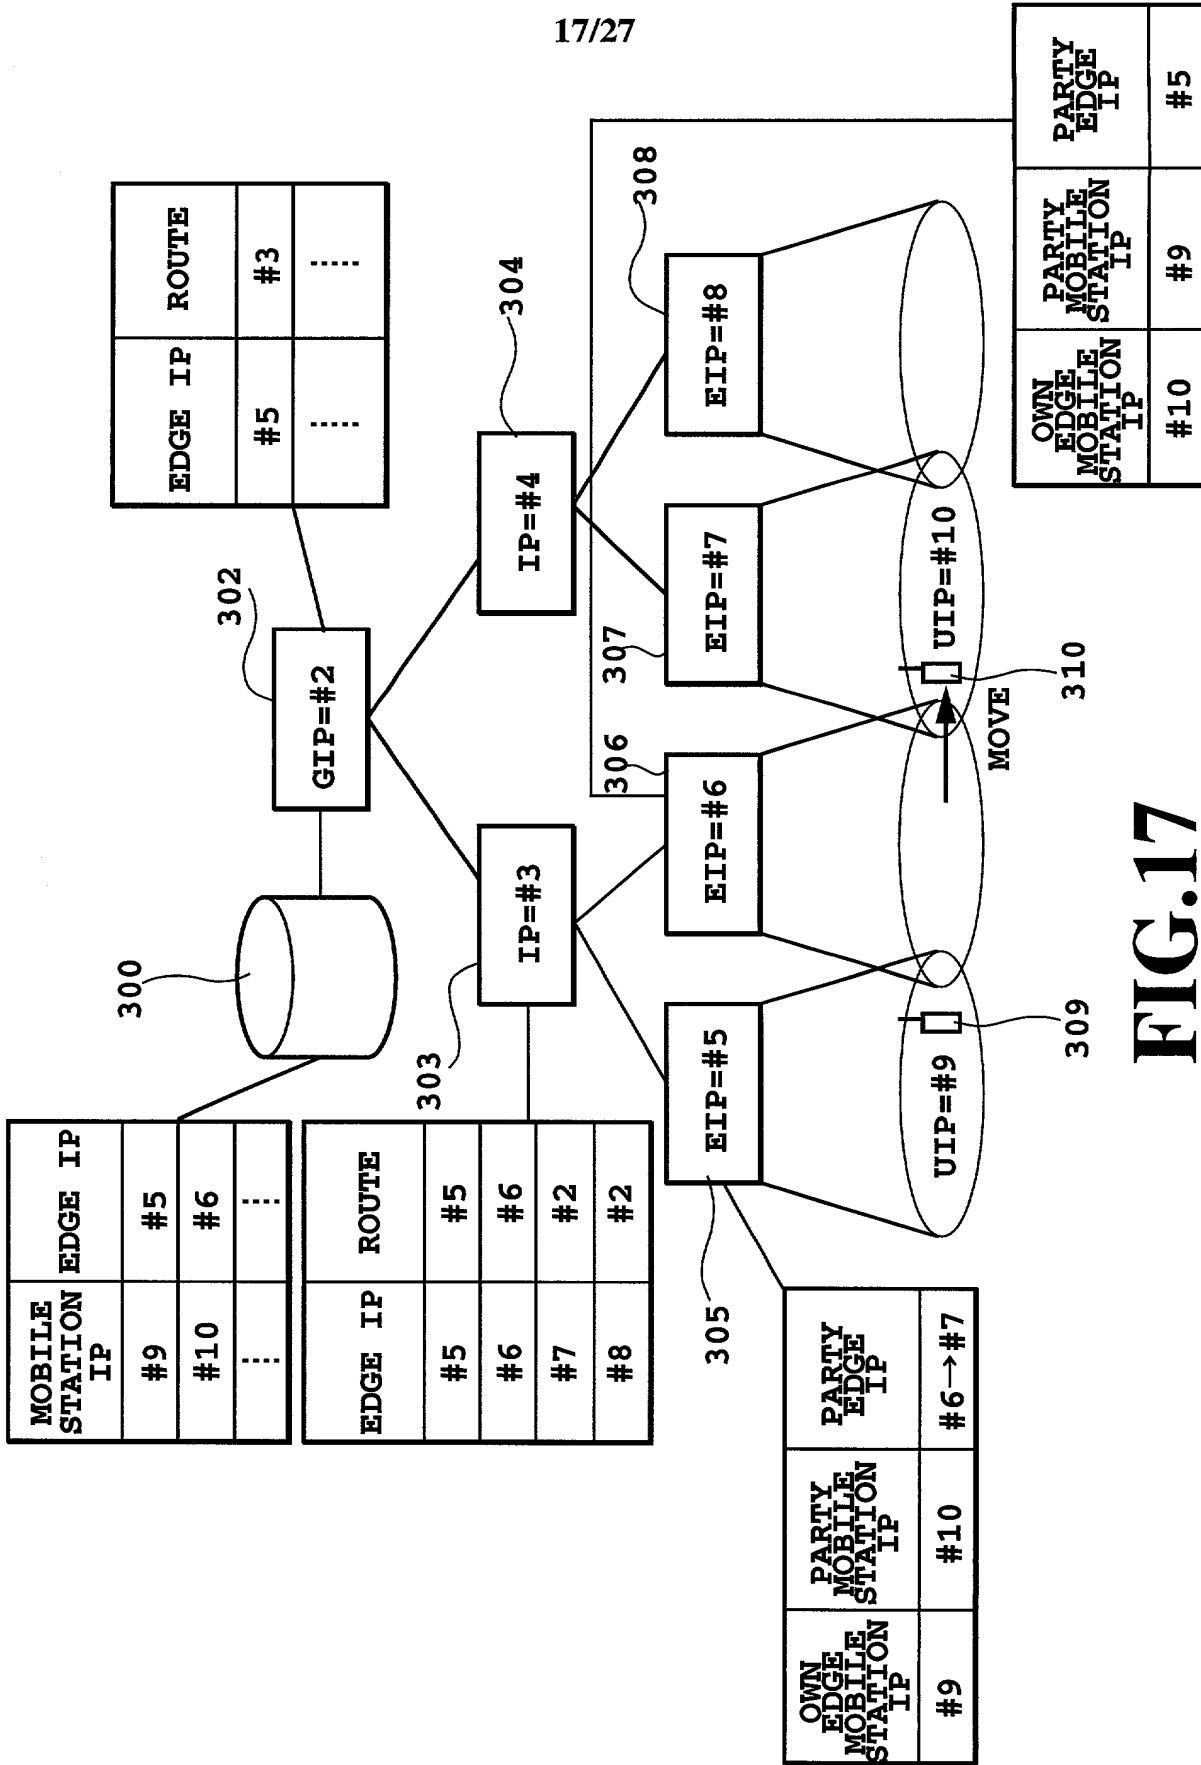
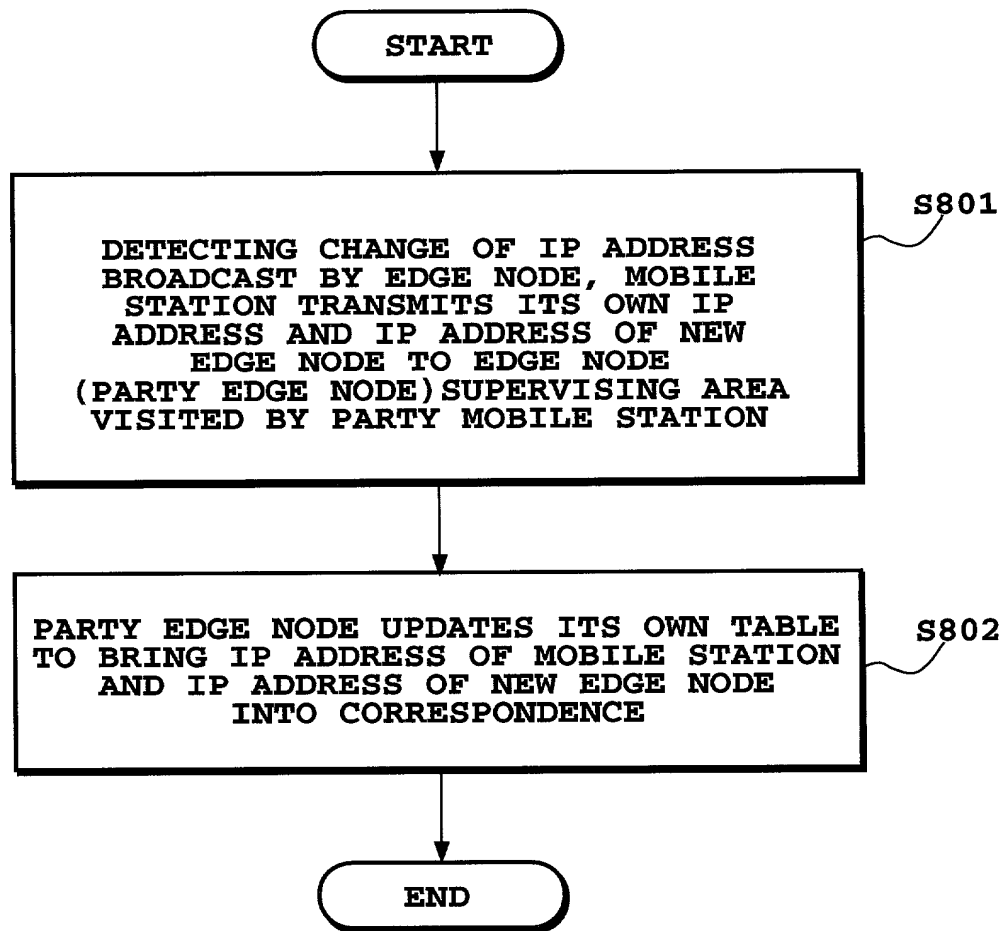


FIG.17

18/27

**FIG.18**

19/27

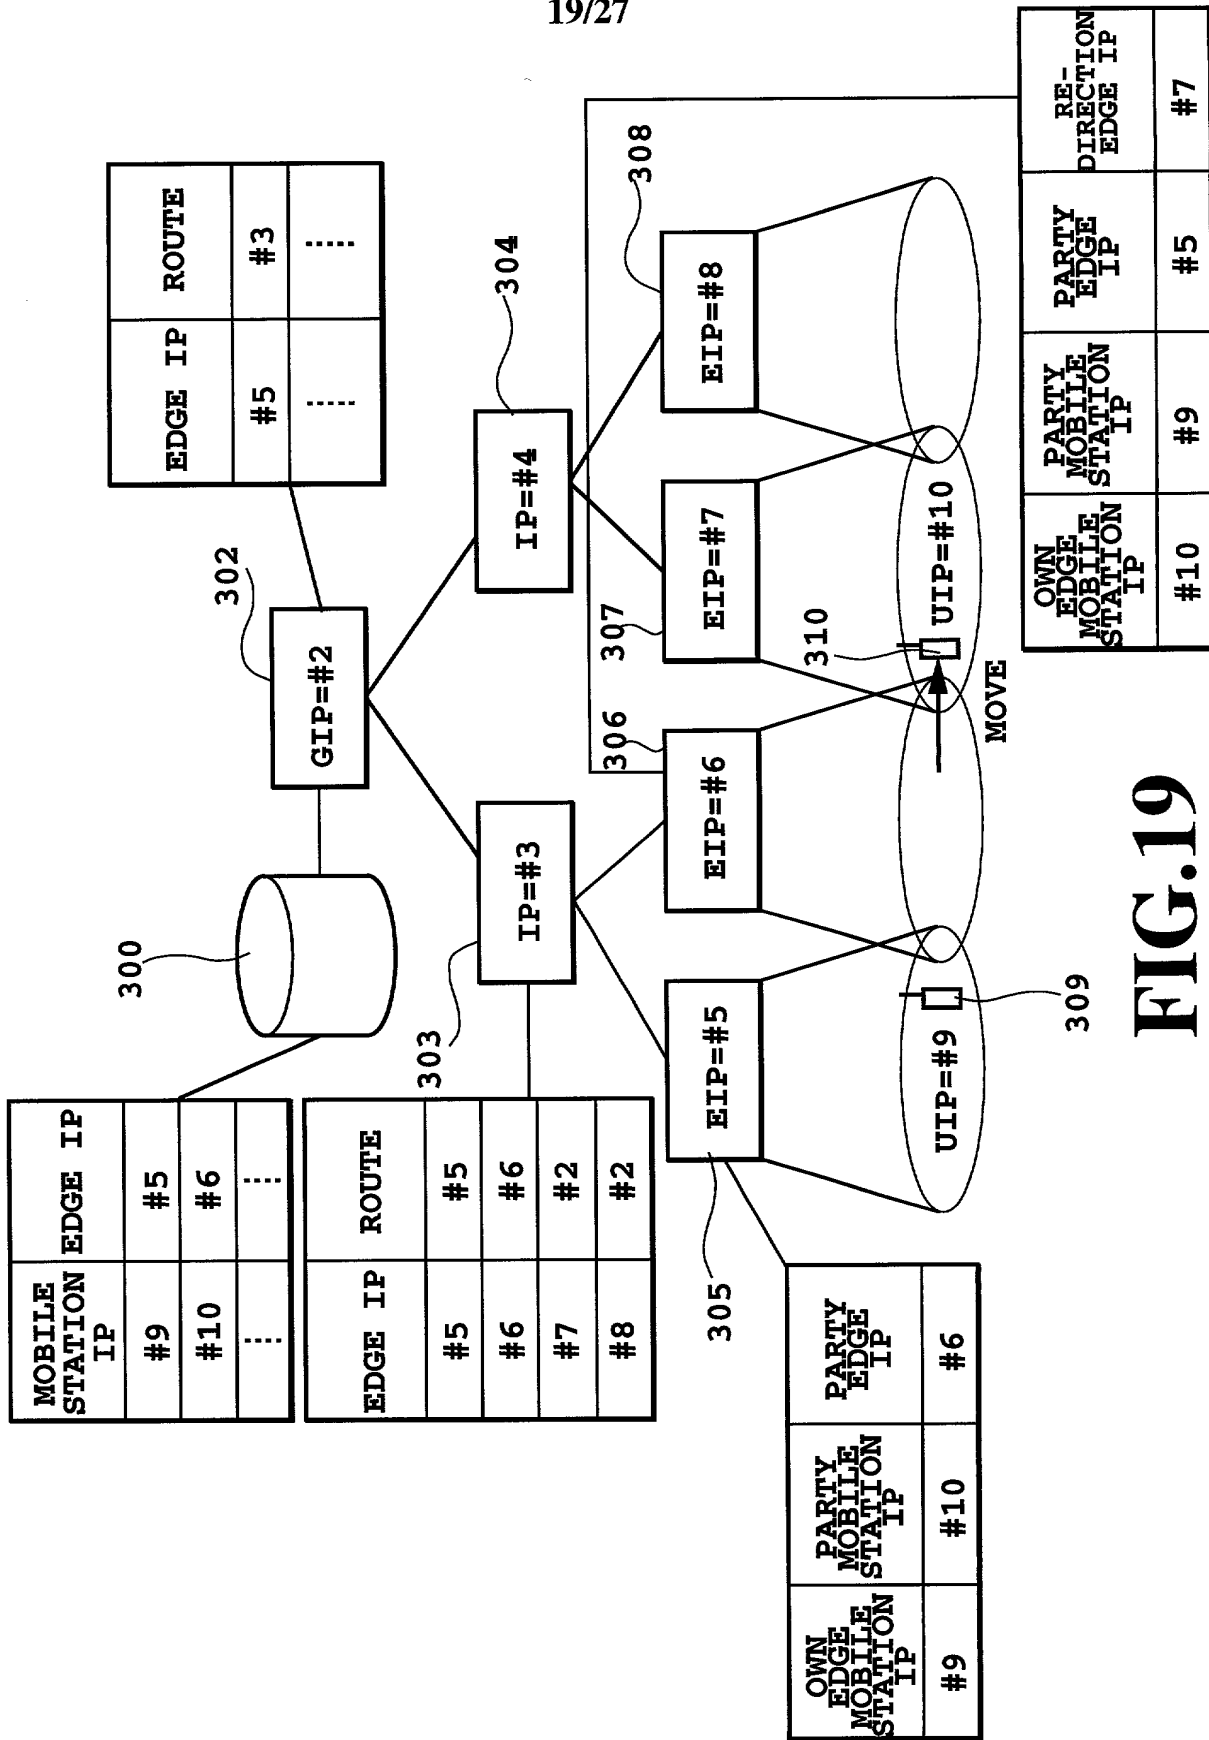
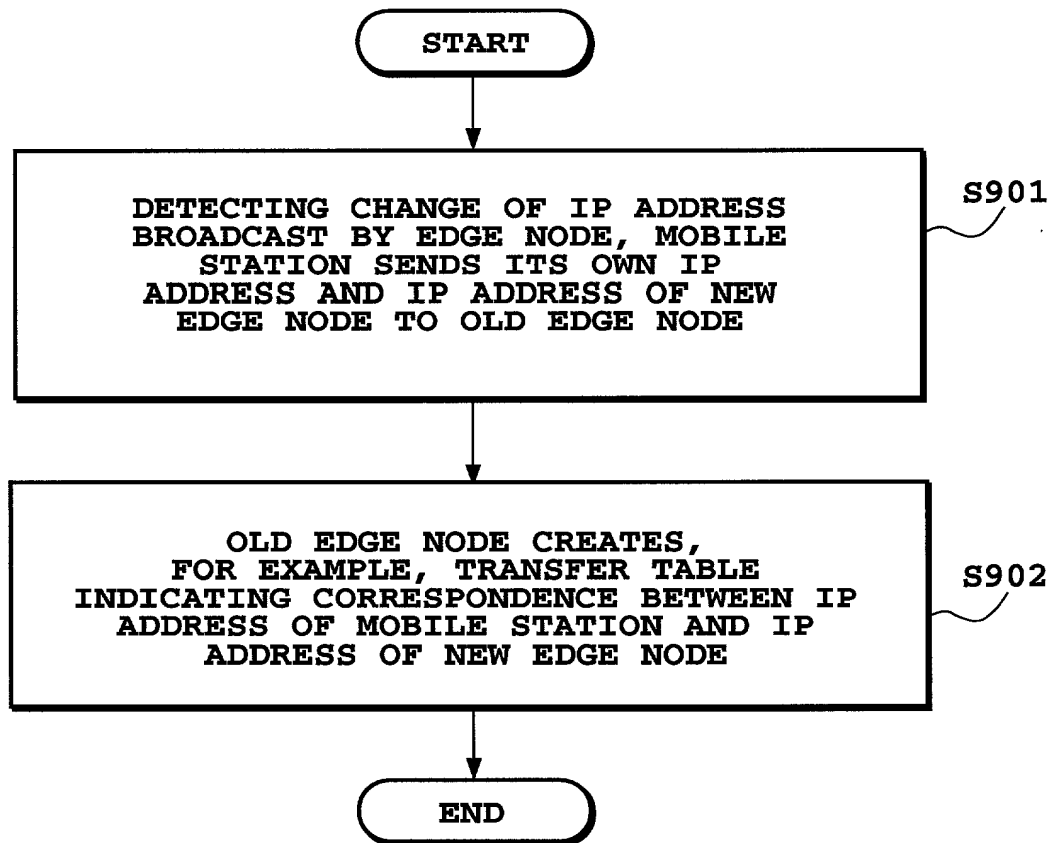


FIG.19

20/27

**FIG.20**

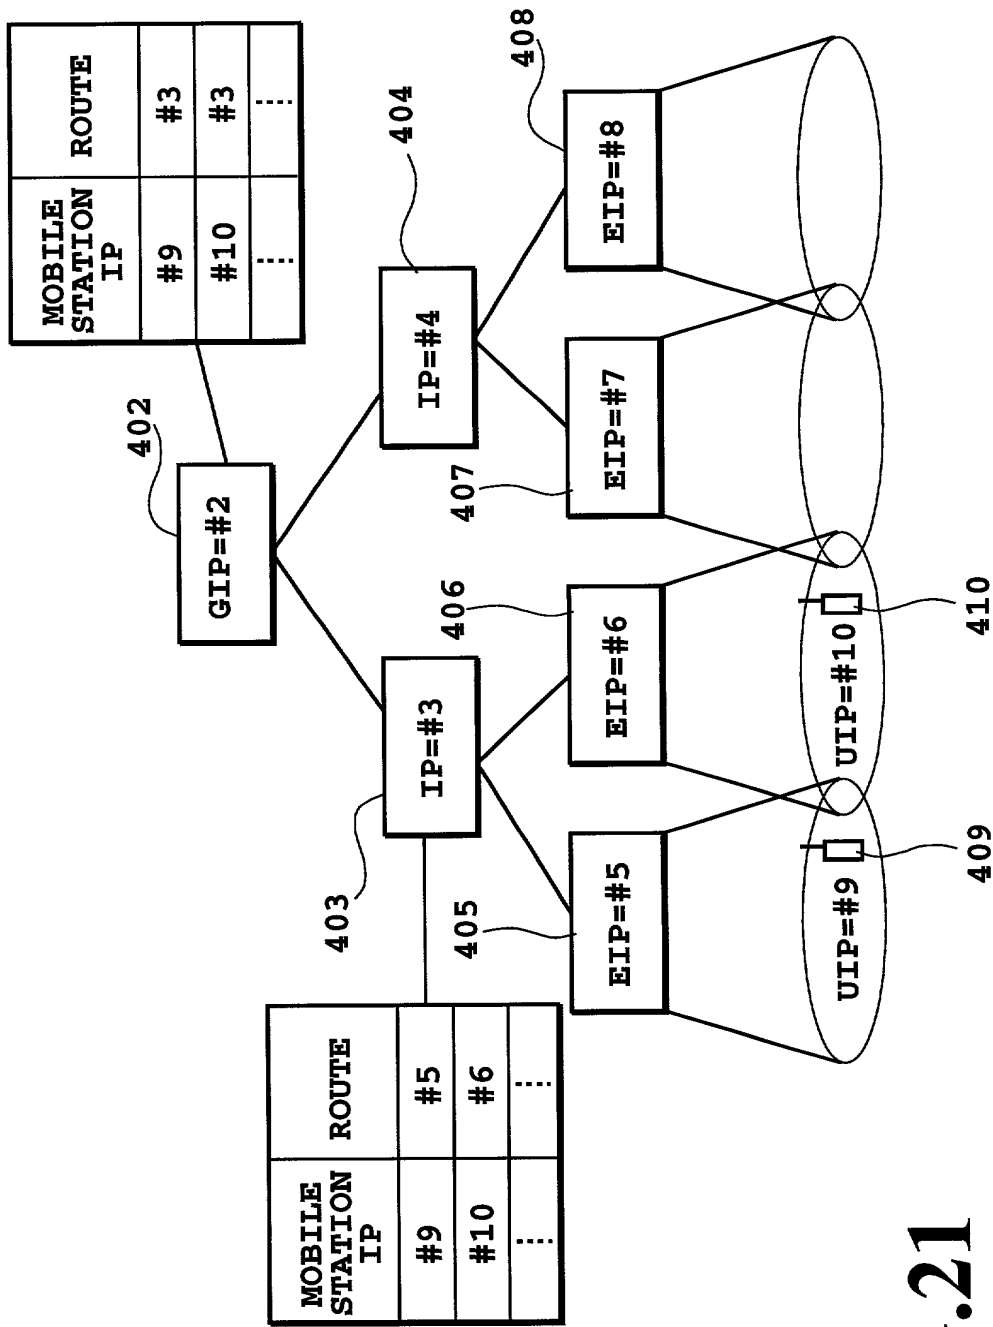
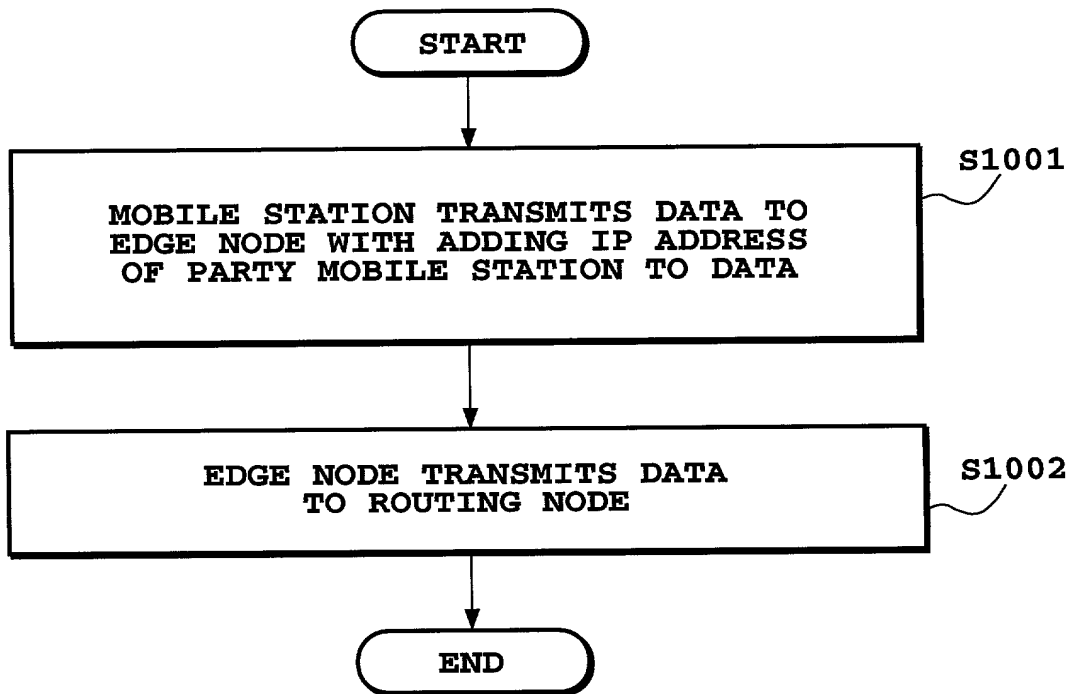


FIG.21

22/27

**FIG.22**

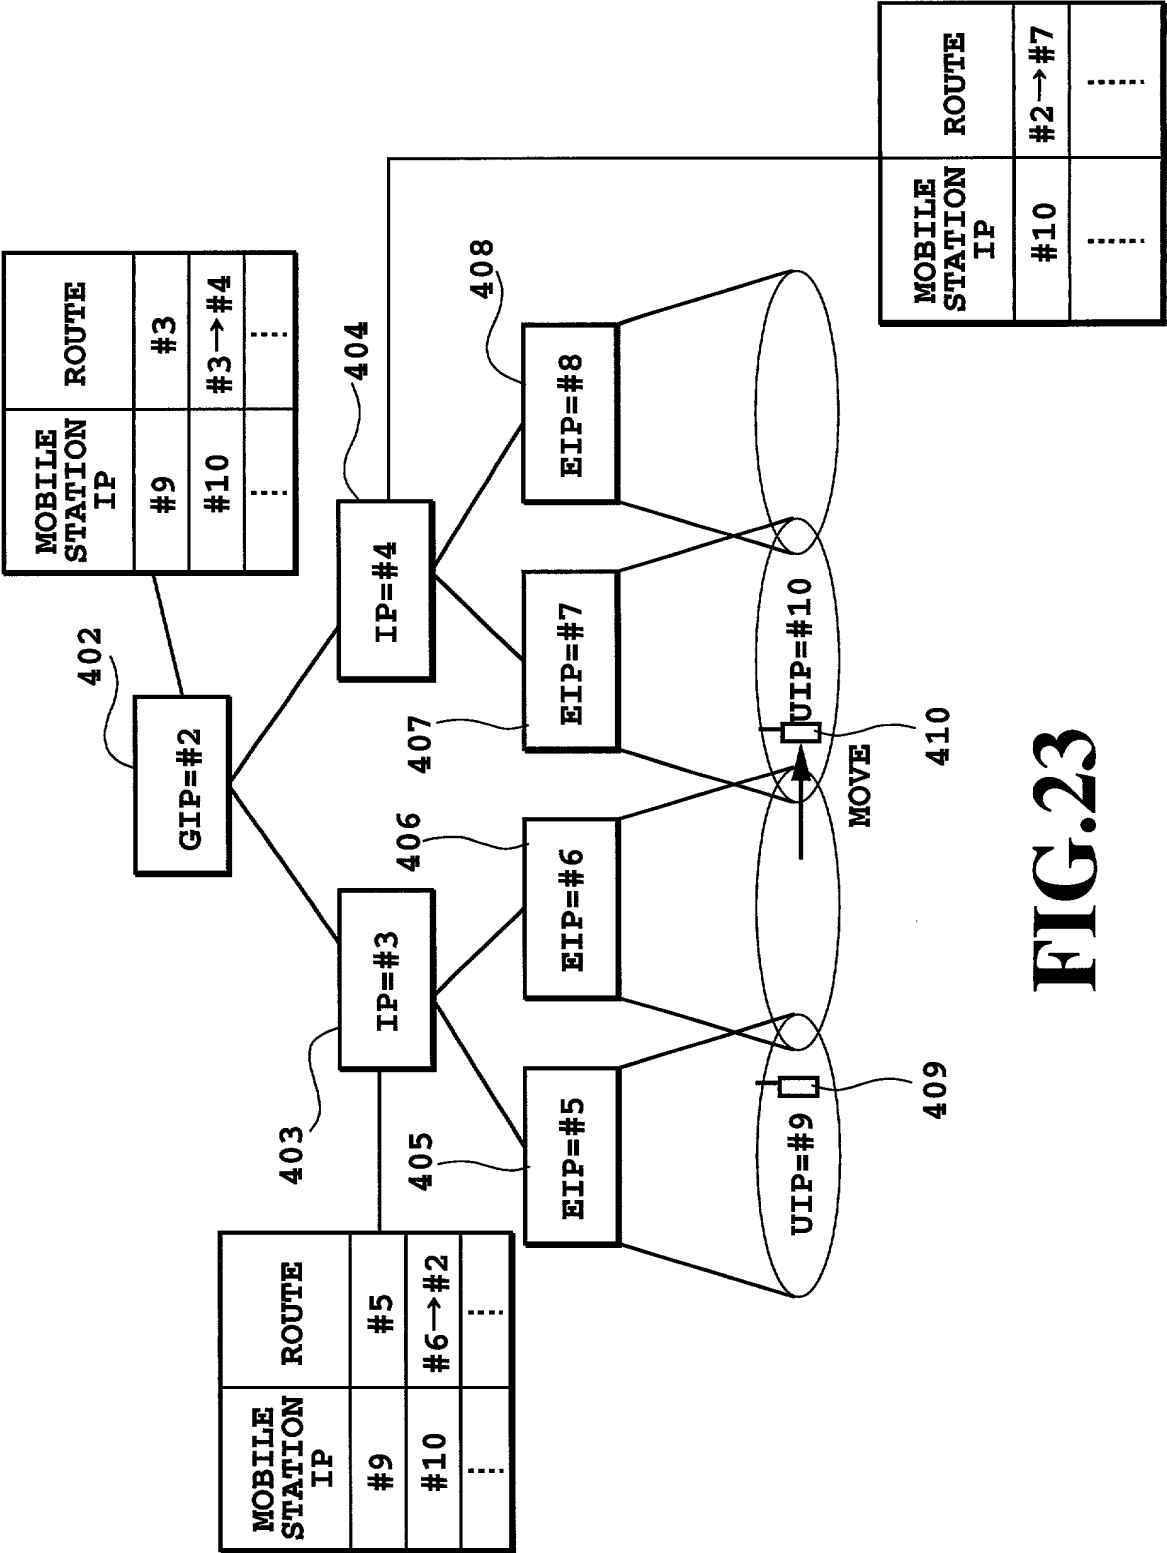


FIG.23



FIG.24

FIG.24A

FIG.24B

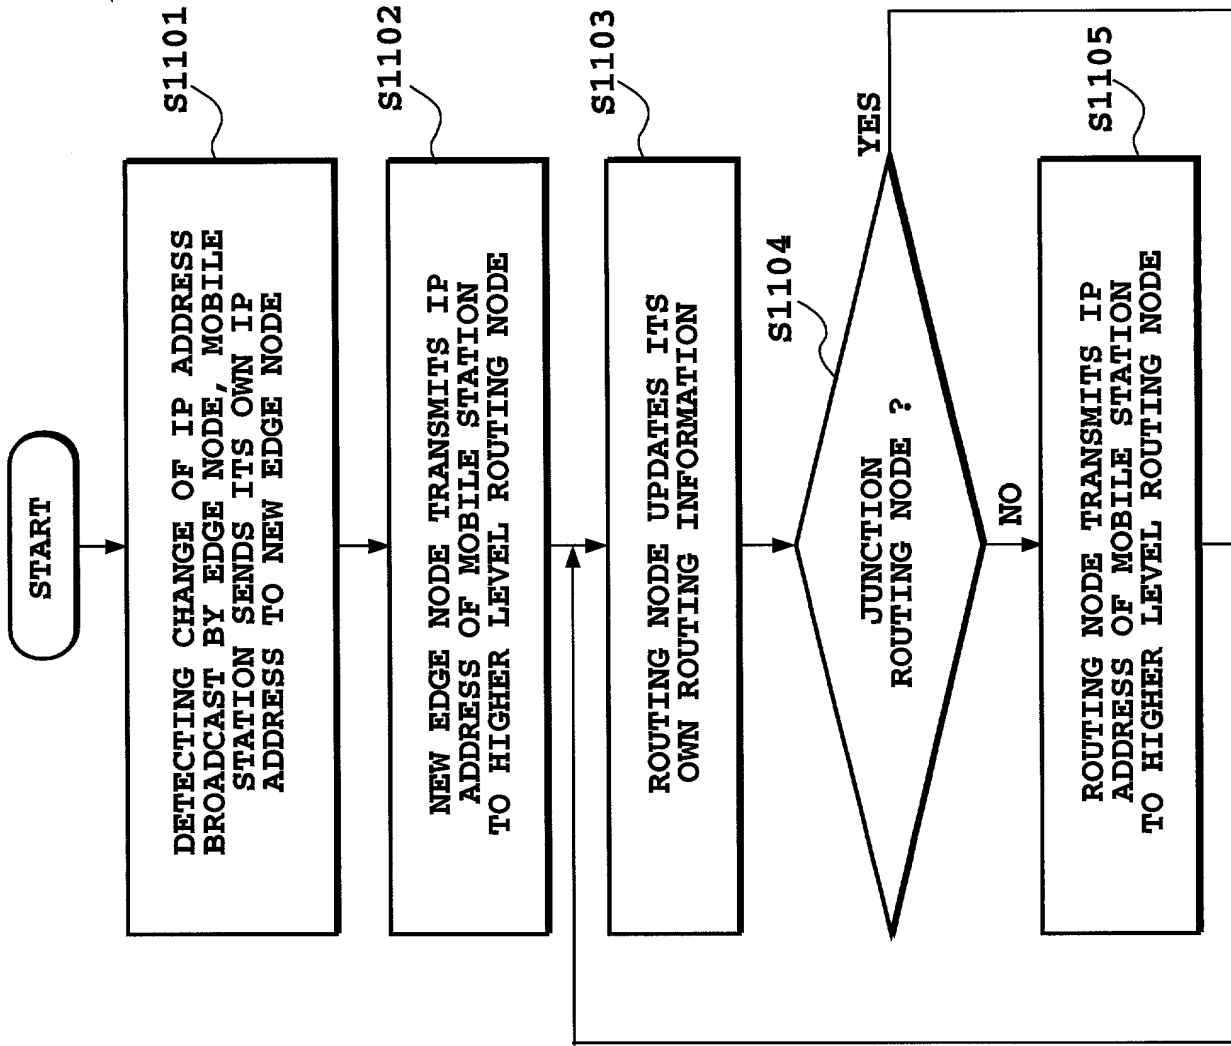


FIG.24A

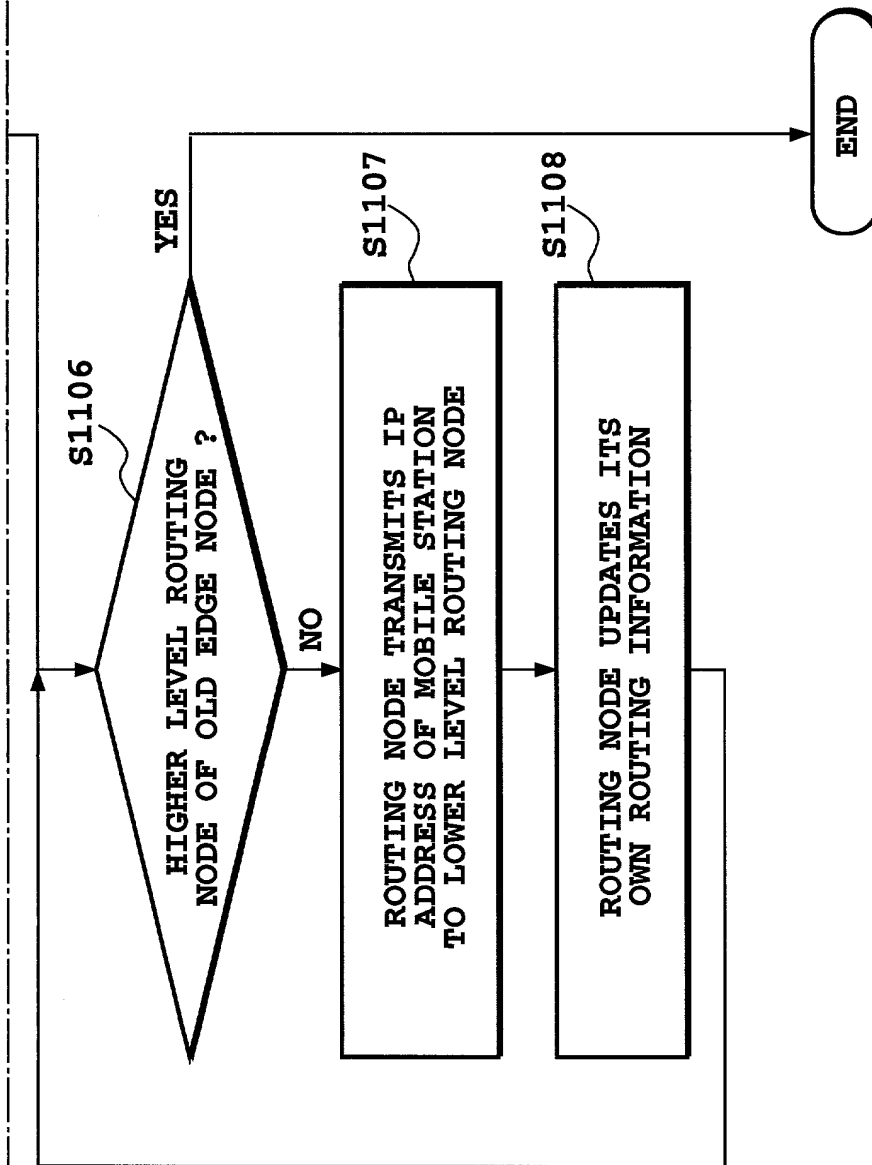


FIG.24B

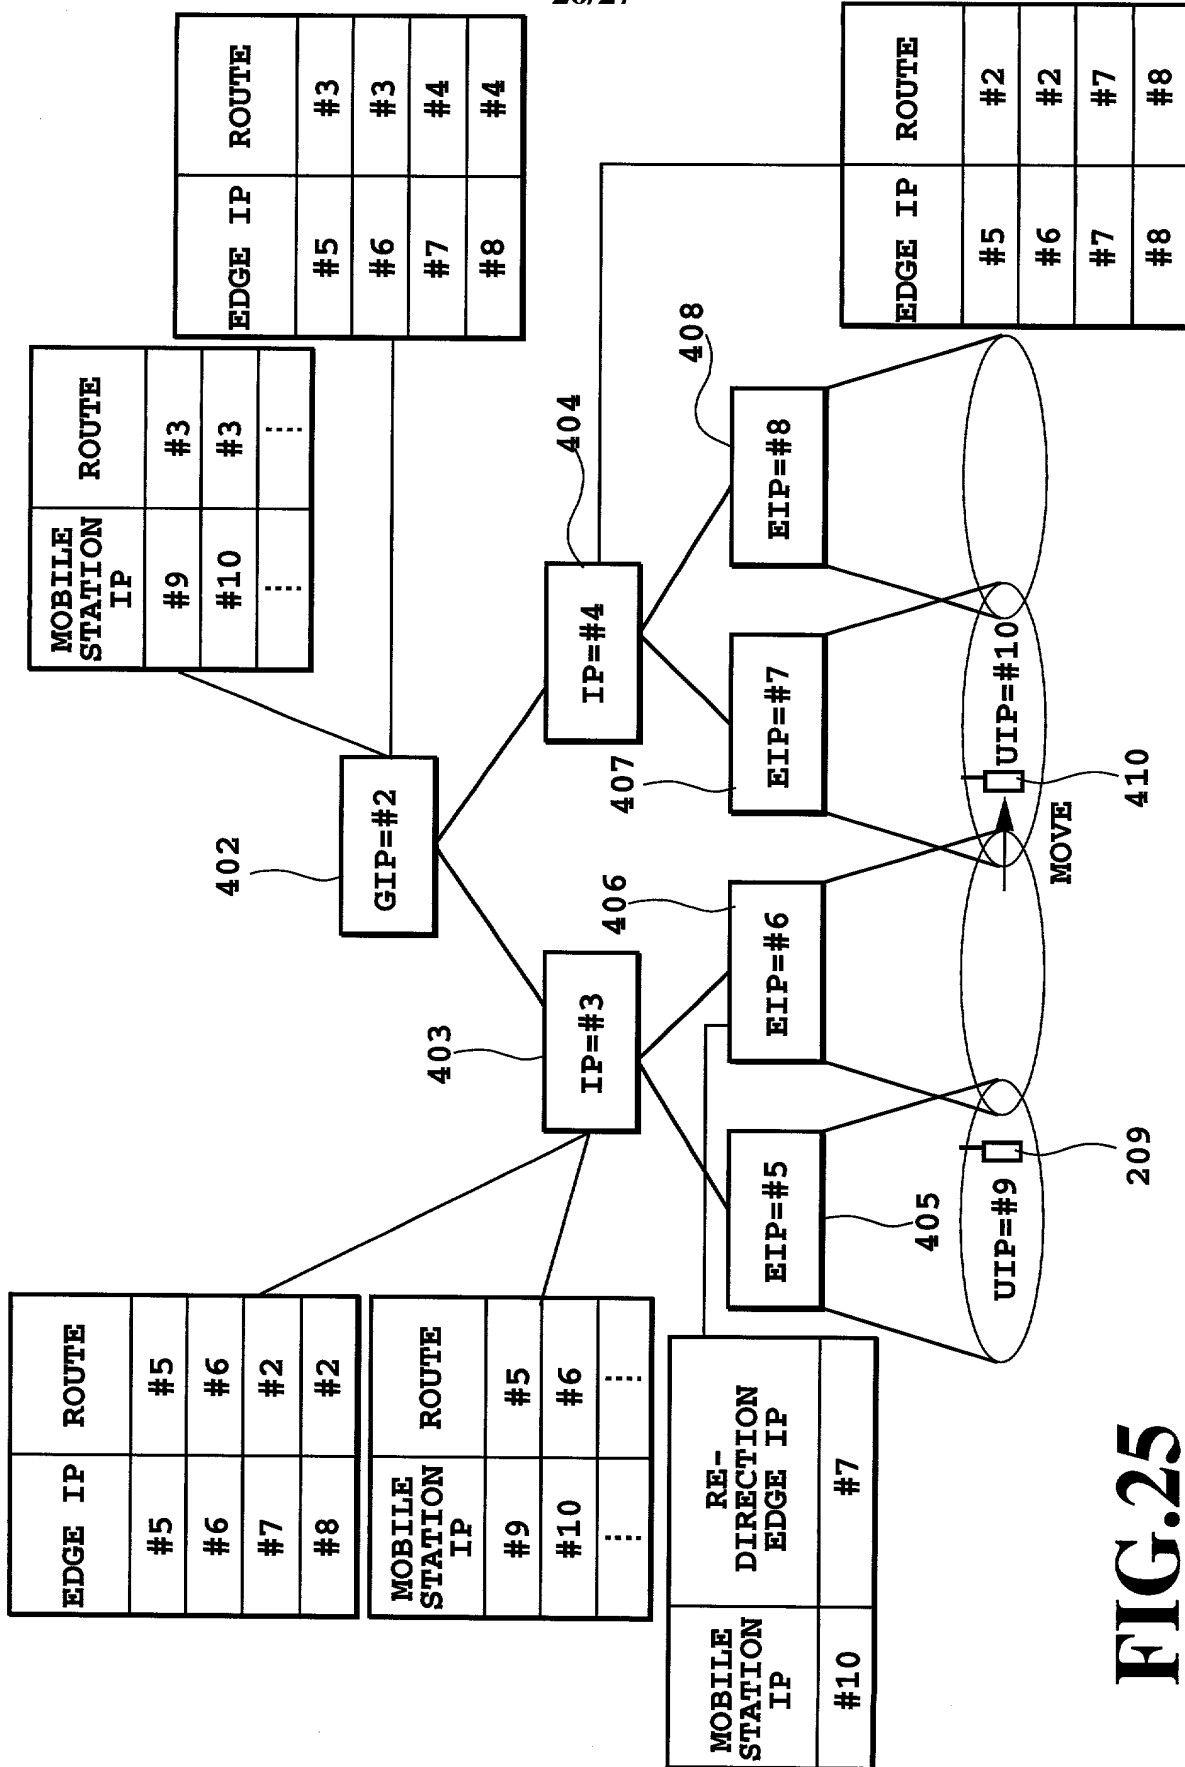
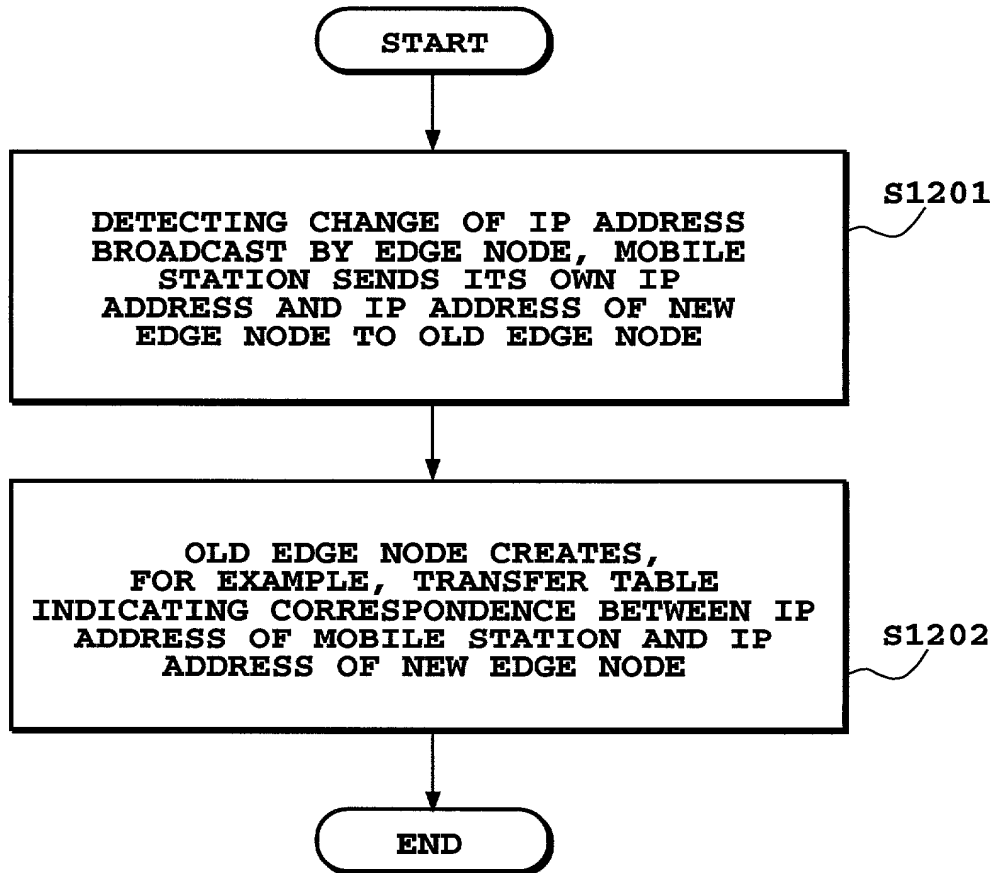


FIG.25

27/27

**FIG.26**

I hereby identify below, and where indicated claim foreign priority benefits under Title 35, United States Code §§ 119(a)-(d) or §§ 365(a)-(b) of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America, filed within 12 months (6 months for design) prior to this application, and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) on which priority is claimed (if any):

Foreign/PCT Application Number	Country	Filing Date (MM/DD/YYYY)	Priority Claimed	
11-158524	Japan	June 4, 1999	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No
			<input type="checkbox"/> Yes	<input type="checkbox"/> No
			<input type="checkbox"/> Yes	<input type="checkbox"/> No

I hereby claim the benefit under Title 35, United States Code, §119(e) of any United States provisional application(s) listed below (if any):

Provisional Application No.	Filing Date

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s), or § 365(c) of any PCT International Application designating the United States of America listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

**DECLARATION AND POWER OF ATTORNEY  
for patent application**

*(COMPLETE IF KNOWN)*

Application Number		Attorney Docket Number	3815/113
Filing Date	2 FEBRUARY 2001	First Named Inventor	OKAGAWA
Group Art Unit			
Examiner			

This declaration is *(check one)*:

- ☒ (X) submitted with initial filing;  
☐ ( ) submitted after initial filing;  
☐ ( ) a supplemental declaration.

This application is of the following type:

- ☒ (X) utility;  
☐ ( ) design;  
☒ (X) national stage of PCT;  
☐ ( ) divisional, continuation or continuation-in-part.

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor *(if only one name is listed below)* or an original, first and joint inventor *(if plural names are listed below)* of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**MOBILE COMMUNICATIONS NETWORK AND DATA DELIVERY METHOD  
IN MOBILE COMMUNICATIONS NETWORK**

the specification of which: *(check one)*

- ☒ (X) is attached hereto; or  
☐ ( ) was filed on \_\_\_\_\_ as U.S. Application No. \_\_\_\_\_ and is/was amended on \_\_\_\_\_ *(if applicable)*;  
☒ (X) was described and claimed in PCT International Application No. PCT/JP00/03598, filed on 2 JUNE 2000 and was amended under PCT Article 19 on N/A *(if applicable)*.

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

U.S./PCT Parent Application No.	Filing Date	Status ( <i>Patented, Pending, or Abandoned</i> )
PCT/JP00/03598	June 2, 2000	Pending

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

As a named inventor, I hereby appoint the following attorney(s) or agent(s) with full power of substitution and revocation to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Seth H. Ostrow, Reg. No. 37,410  
Jonathan T. Kaplan, Reg. No. 38,935  
Matthew J. Marquardt, Reg. No. 40,997  
Frederick Yu, Reg. No. 45,251  
Michael K. Kinney, Reg. No. 42,740  
Brooke W. Quist, Reg. No. 45,030  
Ralph F. Hoppin, Reg. No. 38,494

Frank L. DeRosa, Reg. No. 26,543  
Louis J. Greco, Reg. No. 41,799  
Katrine A. Levin, Reg. No. 41,941  
Michael Malish, Reg. No. 41,968  
Pamela G. Maher, Reg. No. 40,712  
James J. Woods, Reg. No. 47,184

Direct all correspondence to:

Brown Raysman Millstein Felder & Steiner LLP  
120 West 45th Street  
New York, New York 10036

Direct all telephone calls to:

(212) 944-1515

Full Name of Sole or First Inventor	Takatoshi OKAGAWA		
Inventor's Signature	Takatoshi Okagawa	Date	January 30, 2001
Residence	Kanagawa, Japan JPX	Citizenship	Japan
Post Office Address	Hikarinooka 407, 6-1, Yokosuka-shi, Kanagawa 239-0847, Japan		

(check one) Sheets containing additional joint inventors ( X ) are, ( ) are not attached hereto.

200

Full Name of Second Joint Inventor	Shigeo TANIMOTO		
Inventor's Signature	Shigeo TANIMOTO	Date	January 30, 2001
Residence	Kanagawa, Japan JPX	Citizenship	Japan
Post Office Address	Yokosuka Chuo Daikan Plaza 406, 1-1 Yonegahamadori, Yokosuka-shi, Kanagawa, Japan		

300

Full Name of Second Joint Inventor	Fumiaki ISHINO		
Inventor's Signature	Fumiaki Ishino	Date	January 30, 2001
Residence	Tokyo, Japan JPX	Citizenship	Japan
Post Office Address	4-15-1-507 Sekimachiminami, Nerima-ku, Tokyo, Japan		

400

Full Name of Second Joint Inventor	Yoji OSAKO		
Inventor's Signature	Yoji OSAKO	Date	January 30, 2001
Residence	Kanagawa, Japan JPX	Citizenship	Japan
Post Office Address	2-14-7-305 Kugochō, Yokosuka-shi, Kanagawa, Japan		

(check one) Sheets containing additional joint inventors ( ) are, ( X ) are not attached hereto.